

# TEMPOMATIC MIX electronic mixer with removable BIOCLIP spout

Ref. 20870T1

Tall single hole infrared mixer with stainless steel swivelling spout

## DESCRIPTION

**TEMPOMATIC MIX electronic mixer with removable BIOCLIP spout - Ref. 20870T1**

Deck-mounted electronic basin mixer.

Electronic mixer with high, removable, swivelling BIOCLIP spout H. 160mm. Single hole mixer supplied with 2 removable stainless steel spouts L.183mm Ø 28mm.

Independent IP65 electronic control unit.

Mains supply via 230/12V transformer.

Body and spout with smooth interiors (reduces niches where bacteria can develop).

Adjustable duty flush (pre-set to approx. 60 secs every 24h after last use) to prevent water stagnation in the network in the event of prolonged periods of non-use.

Flow rate limited to 5 lpm at 3 bar.

Shockproof infrared presence detection sensor.

Chrome-plated solid brass body with reinforced fixing via 2 stainless steel rods.

Hygiene lever L. 100mm controls temperature.

PEX flexibles with filters and M3/8" solenoid valve.

Anti-blocking safety.

Solenoid valves upstream of the mixing chamber.

Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Suitable for people with reduced mobility.

Mixer with 30-year warranty.

Two shut-off options:

- standard mode: timed flow with automatic shut-off.

- ON/OFF mode: user shuts off flow voluntarily after 30 minutes.

Thermal shocks are possible.

Position the sensor to the side of the mixer in the On/Off mode.

## TECHNICAL CHARACTERISTICS

**TEMPOMATIC MIX electronic mixer with removable BIOCLIP spout - Ref. 20870T1**

Supply	Mains supply 230/12V
Connector	M3/8"
Technology	Electronic mixer
Height	280mm
Drop height	160mm
Spout length	183mm
Flow rate	5 lpm



## ADVANTAGES



Automatic duty flush limits bacterial development




Hygiene: removable spout for internal cleaning







Hygiene: smooth interior reduces bacteria

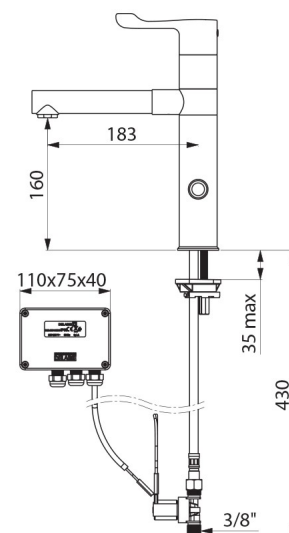

Water saving: split delivery





Finish	Chrome-plated brass
Norms	ACS  
Warranty	
Repairability	