PREMIX COMFORT Group thermostatic mixing valve

Ref. 731400

For mixed water 32°-42°C

DESCRIPTION

PREMIX COMFORT Group thermostatic mixing valve - Ref. 731400

Group thermostatic mixing valve for mixed water distribution from 32° to 42°C:
Anti-scalding safety.
Regulation of temperature variations.
Non-return valves and filters accessible from the exterior without having to remove the mechanism.
Thermal cartridge with no specific lever needed (push-button on the control knob).
Interchangeable cartridge with thermo-reactive cell.
High-resistance chrome-plated brass body.
Maximum hot water temperature: 85°C.
Differential hot water / mixed water: 15°C mini.
Pressure differences at the entrance: 1 bar maximum (0.5 bar recommended).
Minimum pressure / maximum: 1 to 10 bar (1 to 5 bar recommended).
Left hand side hot water inlet (red ring) and right hand side cold water inlet (blue ring).
Mixed water outlet at the top (purple ring).
For bottom outlet: unscrew / place lid at the top and outlet connector at the bottom.
Maximum temperature limiter, can be adjusted by the installer.
Reduced risk of scalding by limiting temperature at the point-of-use.
140 lpm - M1¼".
30-year warranty.

ADVANTAGES

- Automatic shut-off if cold water supply fails
- Temperature stability
- Accessible filters and non-return valves
- Thermo-reactive cell

TECHNICAL CHARACTERISTICS

PREMIX COMFORT Group thermostatic mixing valve - Ref. 731400
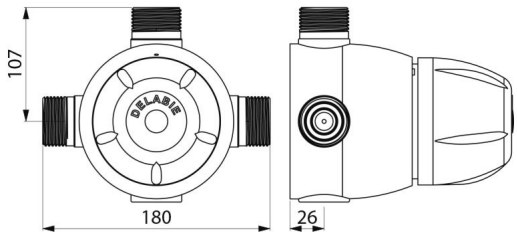
Connector	M1¼"
Technology	Thermostatic
Height	107mm
Depth	26mm
Length	180mm
Flow rate	140 lpm
Norms	ACS, BELGAQUA
Warranty	30 YEAR WARRANTY
Repairability	50 YEARS REPAIRABILITY