

SECURITHERM BIOCLIP

thermostatic basin mixer

Ref. H9605

Single hole, sequential thermostatic mixer H. 95mm L. 120mm

DESCRIPTION

SECURITHERM BIOCLIP thermostatic basin mixer - Ref. H9605

Deck-mounted thermostatic SECURITHERM basin mixer.
Sequential thermostatic mixer: opens and closes with cold water.
No risk of cross flow between the hot and cold water.
No non-return valves on the inlets.
BIOCLIP: mixer is easy to remove for cleaning and disinfection.
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
Single hole mixer with curved spout H. 95mm L. 120mm fitted with a hygienic flow straightener with no impurity retention and thermal shock-resistant.
Scale-resistant sequential thermostatic cartridge for single control of flow rate and temperature.
Cold water temperature adjusts up to 40°C with temperature limiter set at 40°C.
Thermal and chemical shocks are possible.
Body and spout with smooth interiors and low water volume.
Flow rate limited to 5 lpm at 3 bar.
No manual contact thanks to Hygiene control lever L. 146mm.
No pop-up waste.
Supplied with PEX flexibles F3/8" with chrome-plated brass stopcocks.
Fixing reinforced by 2 stainless steel rods.
Ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Mixer suitable for people with reduced mobility.
30-year warranty.
Also available with copper tails.

TECHNICAL CHARACTERISTICS


SECURITHERM BIOCLIP thermostatic basin mixer - Ref. H9605

Connector	3/8"
Technology	SECURITHERM BIOCLIP sequential thermostatic mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass



ADVANTAGES

-  Maximum hygiene: mixer with no non-return valves
-  Hygiene: can be removed for internal cleaning
-  SECURITHERM: Optimal anti-scalding safety
-  Sequential: opens and closes with cold water

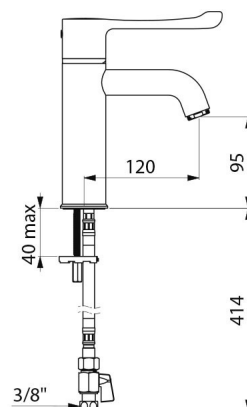

Norms	ACS WRAS   
Warranty	30 YEAR WARRANTY
Repairability	50 YEARS REPAIRABILITY