

# SECURITHERM BIOCLIP

## thermostatic basin mixer

Ref. H9605

Single hole, sequential thermostatic mixer H. 95mm L. 120mm

### DESCRIPTION

**SECURITHERM BIOCLIP thermostatic basin mixer - Ref. H9605**

Deck-mounted thermostatic SECURITHERM basin mixer.  
Sequential thermostatic mixer: opens and closes with cold water.  
No risk of cross flow between the hot and cold water.  
No non-return valves on the inlets.  
BIOCLIP: mixer is easy to remove for cleaning and disinfection.  
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Single hole mixer with curved spout H. 95mm L. 120mm fitted with a hygienic flow straightener with no impurity retention and thermal shock-resistant.  
Scale-resistant sequential thermostatic cartridge for single control of flow rate and temperature.  
Cold water temperature adjusts up to 40°C with temperature limiter set at 40°C.  
Thermal and chemical shocks are possible.  
Body and spout with smooth interiors and low water volume.  
Flow rate limited to 5 lpm at 3 bar.  
No manual contact thanks to Hygiene control lever L. 146mm.  
No pop-up waste.  
Supplied with PEX flexibles F3/8" with chrome-plated brass stopcocks.  
Fixing reinforced by 2 stainless steel rods.  
Ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Mixer suitable for people with reduced mobility.  
30-year warranty.  
Also available with copper tails.





### TECHNICAL CHARACTERISTICS

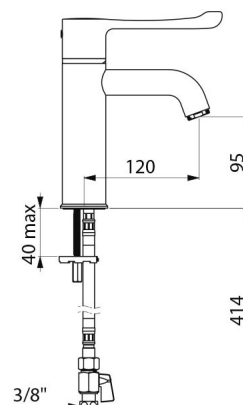
**SECURITHERM BIOCLIP thermostatic basin mixer - Ref. H9605**



Connector	3/8"
Technology	SECURITHERM BIOCLIP sequential thermostatic mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass



### ADVANTAGES

-  Maximum hygiene: mixer with no non-return valves
-  Hygiene: can be removed for internal cleaning
-  SECURITHERM: Optimal anti-scalding safety
-  Sequential: opens and closes with cold water



Norms	<div><div>ACS</div><div>WRAS</div><div></div><div></div><div></div></div>
Warranty	<div><div>30 YEAR WARRANTY</div></div>
Repairability	<div><div>50 YEARS REPAIRABILITY</div></div>