

Electronic sink mixer with BIOCLIP removable spout

Ref. 20871T3

Single hole infrared tall mixer, disposable, swivelling spout

DESCRIPTION

Electronic sink mixer with BIOCLIP removable spout - Ref. 20871T3

Deck-mounted electronic sink mixer.
Electronic mixer with high, swivelling, removable BIOCLIP spout H. 300mm.
Single hole mixer supplied with 1 disposable, recyclable Hostaform® spout L. 180mm Ø 22mm.
Independent IP65 electronic control unit.
Mains supply with 230/12V transformer.
Body and spout with smooth interiors (reduce niches where bacteria can develop).
Adjustable duty flush (pre-set flush for approximately 60 seconds every 24 hours after the last use) to prevent water stagnation in the water supply if the system is not used for prolonged periods.
Flow rate limited to 9 lpm at 3 bar.
Shock-resistant infrared presence detection sensor.
Chrome-plated solid brass body and base and reinforced fixing via 2 stainless steel rods.
Hygiene lever L. 100mm controls temperature.
PEX flexibles with filters and M3/8" solenoid valves.
Anti-blocking security.
Solenoid valves upstream of the mixing chamber.
Electronic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Electronic mixer suitable for people with reduced mobility.
Mixer with 30-year warranty.
Two shut-off options:
- standard mode - timed flow with automatic shut-off;
- ON/OFF mode - user shuts off flow voluntarily or automatic shut-off after 30 minutes.
Thermal shocks are possible.
Position the sensor on the side of the mixer in On/Off mode.

TECHNICAL CHARACTERISTICS

Electronic sink mixer with BIOCLIP removable spout - Ref. 20871T3

Supply	Mains supply 230/12V
Connector	M3/8"
Technology	Electronic mixer
Height	420mm
Drop height	300mm
Spout length	180mm
Flow rate	9 lpm at 3 bar



ADVANTAGES



Automatic anti-bacterial proliferation duty flush




Hygiene: removable spout for internal cleaning



Hygiene: smooth interior reduces bacteria



Water saving: split delivery

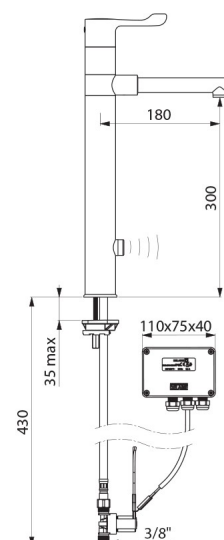

Finish	Chrome-plated brass
Norms	ACS CE 
Warranty	
Repairability	