SECURITHERM thermostatic basin mixer

Ref. H9726

Single hole, dual control tall mixer H. 205 L. 150



DESCRIPTION

SECURITHERM thermostatic basin mixer - Ref. H9726

SECURITHERM thermostatic dual control basin mixer.
Tall, single hole mixer with swivelling spout H. 205mm L. 150mm with smooth interior.
Spout with BIOSAFE hygienic outlet, suitable for fitting a BIOFIL filter.
Anti-scalding failsafe: shuts off immediately if the cold or hot water supply fails.
Scale-resistant thermostatic cartridge for temperature control.
¼-turn ceramic head for adjusting the flow rate.
Temperature can be adjusted: cold water up to 41°C.
Two temperature limiters: first temperature limiter set at to 38°C (can be overridden), and second temperature limiter set at 41°C.
Thermal shocks are easy to undertake without removing the control knob or shutting off the cold water supply.
Flow rate regulated at 5 lpm.
ERGO control knobs.
Ergonomic stainless steel pop-up waste, 1" 1/4.
PEX flexibles F3/8" with filters and non-return valves.
Fixing reinforced via 2 stainless steel rods.
Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Mixer suitable for people with reduced mobility.
Mixer with 30-year warranty.


ADVANTAGES

- SECURITHERM: Optimum anti-scalding safety
- Hygiene: smooth interior reduces bacteria
- Thermostatic: total temperature stability
- Thermal shock possible without removing the lever

TECHNICAL CHARACTERISTICS

SECURITHERM thermostatic basin mixer - Ref. H9726

Connector	F3/8"
Technology	SECURITHERM thermostatic mixer
Height	307mm
Drop height	205mm
Spout length	150mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	ACS, BELGAQUA

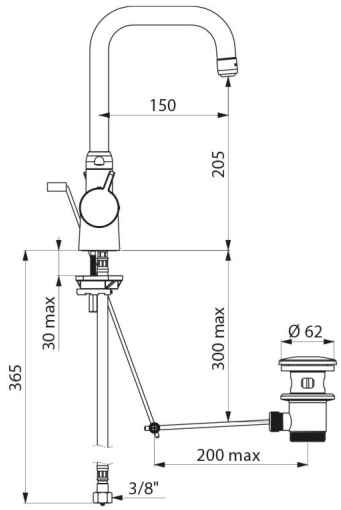

Warranty	
Repairability	