SECURITHERM EP BIOCLIP pressure-balancing basin mixer



Ref. 2821TEP

Single hole removable mechanical mixer H.95mm L.120mm, solid lever



DESCRIPTION

SECURITHERM EP BIOCLIP pressure-balancing basin mixer - Ref. 2821TEP

Deck-mounted mechanical basin mixer with pressure-balancing.
BIOCLIP mechanical mixer: mixer can be removed entirely for cleaning and disinfection.
Single hole mixer with spout H. 95mm L. 120mm fitted with a BIOSAFE hygienic flow straightener.
Spout suitable for fitting a BIOFIL point-of-use filter.
Ø 35mm ceramic cartridge with pressure-balancing and pre-set maximum temperature limiter.
Thermal shocks are possible wiithout removing the control lever or shutting off the cold water supply.
Total anti-scalding safety: HW flow rate is reduced if CW supply fails (and vice versa).
Stable temperature regardless of variations in pressure and flow rate in the system.
Body and spout with smooth interiors and low water volume.
No risk of cross flow between the hot and cold water.
No non-return valves on the inlets.
Flow rate limited to 5 lpm at 3 bar.
Solid control lever.
No pop-up waste.
F3/8" PEX flexibles with stopcocks.
Filters and non-return valves.
Fixing reinforced via 2 stainless steel rods.
Mechanical mixer with SECURITHERM pressure-balancing, ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Single hole mixer suitable for people with reduced mobility.
Mixer with 30-year warranty.


ADVANTAGES

- HW flow rate reduced if CW fails
- Hygiene: remove for internal descaling
- Hygiene: smooth interior reduces bacteria
- EP: reduces temperature variations

TECHNICAL CHARACTERISTICS

SECURITHERM EP BIOCLIP pressure-balancing basin mixer - Ref. 2821TEP

Connector	F3/8"
Technology	SECURITHERM EP BIOCLIP
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass

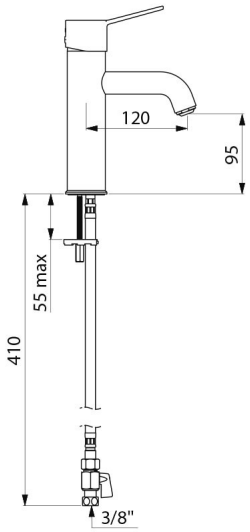

Norms	ACS, WRAS, BELGAQUA
Warranty	30 YEAR WARRANTY
Repairability	50 YEARS REPAIRABILITY