

SECURITHERM EP pressure-balancing basin mixer

Ref. 2565T1EP

Tall, single hole, single control mixer with EP cartridge



DESCRIPTION

SECURITHERM EP pressure-balancing basin mixer - Ref. 2565T1EP

Deck-mounted basin mixer with SECURITHERM pressure-balancing. Single hole, single control mixer with fixed spout H. 165mm L. 140mm. Tall mixer with BIOSAFE hygienic flow straightener suitable for fitting a BIOFIL terminal filter. Total anti-scalding safety: HW flow rate is reduced if CW water supply fails (and vice versa). Stable temperature regardless of pressure and flow rate variations in the system. Ø 35mm ceramic pressure-balancing cartridge with pre-set maximum temperature limiter. Body and spout with smooth interiors (reduces bacterial development). Thermal shocks are easy to undertake a thermal shock without removing the lever or shutting off the cold water supply. Flow rate regulated at 5 lpm. Body and base made from chrome-plated brass. Hygiene control lever L. 185mm requires no manual contact. Supplied with F3/8" PEX flexibles with filters and non-return valves. Reinforced fixing via 2 stainless steel rods. Mechanical mixer with pressure-balancing ideal for healthcare facilities, retirement and care homes, hospitals and clinics. Single hole mixer suitable for people with reduced mobility. 30-year warranty.

TECHNICAL CHARACTERISTICS

SECURITHERM EP pressure-balancing basin mixer - Ref. 2565T1EP

Connector	F3/8"
Technology	SECURITHERM EP mixer
Height	291mm
Drop height	160mm
Spout length	140mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass

ADVANTAGES



EP: HW flow rate reduced if CW fails




EP: reduces pressure variations



Thermal shock without removing the control lever



Hygiene: smooth interior reduces bacteria

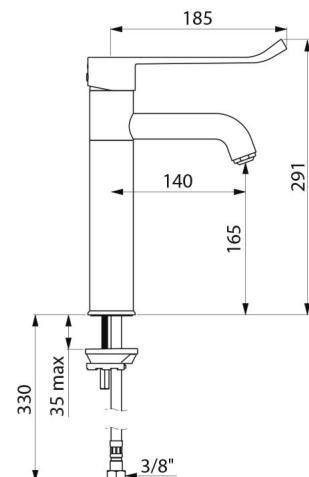

Norms

ACS



Warranty



Repairability

