SECURITHERM Securitouch thermostatic shower mixer

Ref. H9741S

Dual control thermostatic mixer

DESCRIPTION

SECURITHERM Securitouch thermostatic shower mixer - Ref. H9741S

SECURITHERM dual control thermostatic shower mixer.
Mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.
Prevents cold showers: shuts off automatically if hot water supply fails.
Securitouch thermal insulation to prevent burns.
Scale-resistant thermostatic cartridge for temperature adjustment.
¼ -turn ceramic head for flow rate adjustment.
Temperature control from 25 - 41°C.
Double temperature limiter: 1st limiter set at 38°C can be overridden, 2nd limiter set at 41°C.
Thermal shocks are are easy to undertake without removing the control knob or shutting off the cold water.
Flow rate regulated at 9 lpm.
Chrome-plated brass body and ERGO controls.
M1/2" shower outlet.
F3/4" inlets with integrated filters and non-return valves.
Wall-mounted mixer with M1/2" M3/4" off-set standard connectors.
Mixer ideal for healthcare facilities, retirement and care home, hospitals and clinics.
Mixer suitable for people with reduced mobility
Shower mixer with 30-year warranty.

ADVANTAGES

- SECURITHERM: Optimum anti-scalding safety
- Double temperature limiter
- Securitouch thermal insulation prevents burns
- Thermostatic: complete temperature stability

TECHNICAL CHARACTERISTICS

SECURITHERM Securitouch thermostatic shower mixer - Ref. H9741S
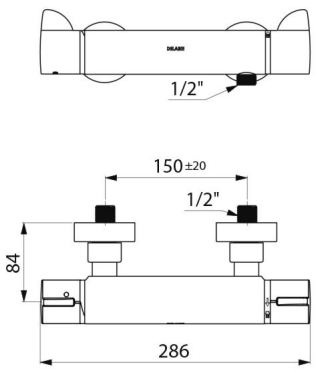
Connector	M1/2"
Technology	SECURITHERM Securitouch thermostatic mixer
Depth	84mm
Length	286mm
Flow rate	9 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	ACS
Warranty	30 YEAR WARRANTY