

# Auto-draining shower kit with thermostatic mixer

Ref. H9630HYG

Thermostatic sequential mixer with no non-return valves

## DESCRIPTION

**Auto-draining shower kit with thermostatic mixer - Ref. H9630HYG**

SECURITHERM thermostatic sequential shower kit with auto-draining device.

- Mixer with scale-resistant, thermostatic sequential cartridge: Thermostatic sequential mixer: opens and closes with cold water. Mixer with no non-return valves on the inlets (reduces bacterial proliferation). No risk of cross flow between hot and cold water. Sequential mixer with anti-scalding failsafe: shuts off automatically if cold or hot water supply fails. Securitouch thermal insulation prevents burns. Temperature control from cold water up to 39°C with maximum temperature limiter set at 39°C. Thermal shocks are possible. Body with smooth interior and low water volume. Flow rate regulated at 9 lpm. Chrome plated brass body and Hygiene lever L. 100mm. M1/2" bottom shower outlet. Wall-mounted mixer with offset STOP/CHECK connectors, M1/2" M3/4". Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
- Shower head (ref. 813) with flexible shower hose (ref. 836T3) and adjustable, chrome-plated wall-mounted support (ref. 845).
- Auto-draining device FM1/2" for installation between the flexible hose and the shower head, automatically drains the shower head and flexible hose (reduces bacterial development) (ref. 880).

Suitable for people with reduced mobility.  
30-year warranty.

## TECHNICAL CHARACTERISTICS

**Auto-draining shower kit with thermostatic mixer - Ref. H9630HYG**

|                     |                                         |
|---------------------|-----------------------------------------|
| Connector           | M1/2"                                   |
| Technology          | SECURITHERM single control, Securitouch |
| Depth               | 185mm                                   |
| Length              | 184mm                                   |
| Flow rate           | 9 lpm                                   |
| Temperature limiter | 39°C                                    |
| Finish              | Chrome-plated brass                     |

Norms

**ACS**



## ADVANTAGES



Sequential: opens/closes with cold water




Maximum hygiene: no non-return valves



SECURITHERM: Optimal anti-scalding safety



Thermostatic: total temperature stability

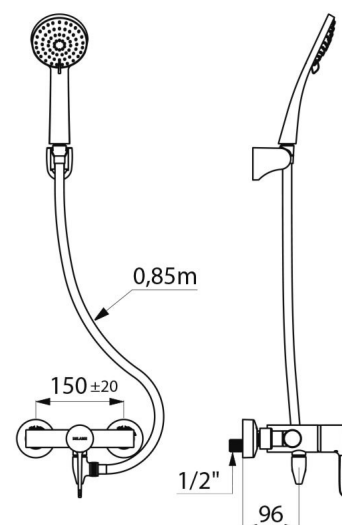

Warranty



Repairability

