

Securitouch thermostatic shower kit

Ref. H9641

Thermostatic sequential mixer with no non-return valves

DESCRIPTION

Securitouch thermostatic shower kit - Ref. H9641

Shower kit for exposed wall mounting:

- SECURITHERM thermostatic sequential shower mixer (ref. H9640). Thermostatic sequential mixer: opens and closes with cold water. Mixer with no non-return valves on the inlets (reduces bacterial proliferation). No risk of cross flow between the hot and cold water. Sequential mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails. Prevents cold showers: shuts off automatically if hot water supply fails. Securitouch thermal insulation prevents burns. Scale-resistant thermostatic sequential cartridge for adjusting the flow rate and the temperature. Temperature control from cold water up to 39°C with maximum temperature limiter set at 39°C. Thermal shocks are possible. Body with smooth interior and low water volume (reduces niches where bacteria can develop). Chrome-plated brass body and Hygiene lever L.100mm. M3/4" shower outlet, top outlet. Wall-mounted mixer with offset STOP/CHECK connectors, M1/2" M3/4". Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics. Sequential mixer suitable for people with reduced mobility.
 - Fixed TONIC JET shower head with automatic flow rate regulation. Flow rate 6 lpm at 3 bar. Ligature-resistant, scale-resistant spray head with adjustable spray. Chrome-plated solid brass body fixed in place with concealed locking screws.
 - Ø 16mm shower column with reinforced collar (fixing plate and screws included).
- Shower mixer with 30-year warranty.

TECHNICAL CHARACTERISTICS

Securitouch thermostatic shower kit - Ref. H9641

Connector	M1/2"
Technology	SECURITHERM Securitouch sequential thermostatic mixer
Depth	90mm
Flow rate	Flow rate regulated at 9 lpm (mixer only), 6 lpm at 3 bar with shower head
Temperature limiter	Yes
Finish	Chrome-plated brass



ADVANTAGES



Sequential: opens/closes with cold water




Maximum hygiene: no non-return valves



SECURITHERM: optimal anti-scalding safety



Thermostatic: complete temperature stability

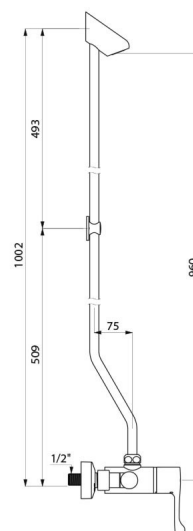

Norms	ACS 
Warranty	