

# SECURITHERM shower panel

Ref. 792300

Thermostatic time flow

## DESCRIPTION

**SECURITHERM shower panel - Ref. 792300**

Thermostatic time flow shower panel:  
Anodised aluminium shower panel for wall-mounted, exposed installation.  
Top inlet via in-line stopcocks M $\frac{1}{2}$ ".  
SECURITHERM thermostatic shower mixer.  
Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.  
Anti-scalding failsafe: automatic shut-off if cold water fails.  
Anti-cold showers function: automatic shut-off if hot water fails.  
Soft-touch operation.  
Chrome-plated, tamperproof, scale-resistant fixed, ROUND shower head with automatic flow rate regulation.  
Time flow ~30 seconds.  
Flow rate 6 lpm at 3 bar.  
Concealed fixings.  
Filters and non-return valves.  
This product is compatible with thermal and chemical shocks in accordance with current guidelines.  
Time flow shower panel suitable for people with reduced mobility.  
30-year warranty.

## TECHNICAL CHARACTERISTICS

**SECURITHERM shower panel - Ref. 792300**

Connector	M $\frac{1}{2}$ "
Technology	Time flow
Height	1050mm
Depth	65mm
Width	210mm
Flow rate	6 lpm
Temperature limiter	Thermostatic
Finish	Aluminium

Norms



## ADVANTAGES



Thermostatic control




Instant shut-off if cold water fails



80% water savings



Panel made from aluminium and controls from brass

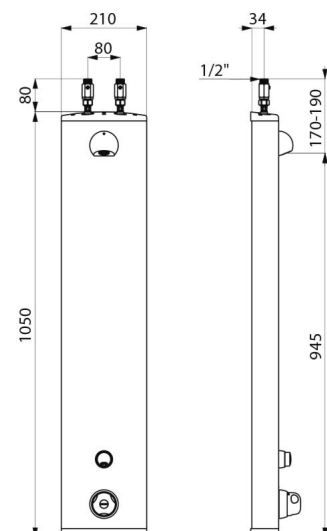

Warranty



Repairability

