TEMPOMIX time flow shower panel

Ref. 790350

Time flow single control




DESCRIPTION

TEMPOMIX time flow shower panel - Ref. 790350

Time flow aluminium shower panel with handset:
Anodised aluminium shower panel for wall-mounted, exposed installation.
Top inlet supply with in-line stopcocks M½".
TEMPOMIX mixer with adjustable maximum temperature limiter.
Soft-touch operation.
Time flow ~30 seconds.
Flow rate 11 lpm at 3 bar dynamic pressure.
Sliding handset on chrome-plated rail with flexible hose.
Concealed fixings.
Filters and non-return valves.
This product is compatible with thermal and chemical shocks in accordance with current guidelines.
30-year warranty.

ADVANTAGES

- 80% water savings
- Temperature control on the mixer
- Handset is removable
- Aluminium panel, brass controls

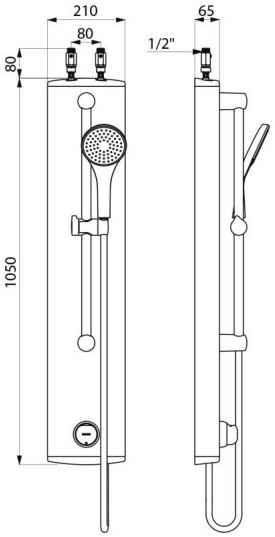

TECHNICAL CHARACTERISTICS

TEMPOMIX time flow shower panel - Ref. 790350

Connector	M½"
Technology	Time flow
Height	1.05mm
Depth	65mm
Width	210mm
Flow rate	11 lpm
Finish	Aluminium
Norms	ACS, BELGAQUA
Warranty	30 YEAR WARRANTY