# TEMPOMATIC direct flush valve

Ref. 463030

Direct flush WC valve

## DESCRIPTION

**TEMPOMATIC direct flush valve - Ref. 463030**

Flush system without cistern: directly connected to pipework.
Mains supply with 1" solenoid valve.
230/12V transformer.
IP65 independent electronic unit.
For cross wall installation on walls ≤ 30mm.
Shock-resistant infrared presence detection sensor.
Contactless automatic flush when the user leaves or voluntary activation (when hand is detected ~4cm in front of the sensor).
Time flow ~7 seconds, can be adjusted from 3 - 12 seconds.
Detection distance, flow rate and flush volume can be adjusted.
Stopcock FF1".
Vacuum breaker Ø32mm
Connection washer Ø 32/55mm.
Wall plate flush to the wall.
Threaded rod can be cut to size.
Base flow rate: 1 L/sec at 1 bar dynamic pressure.
Compatible with rain water.
Suitable for rimless WC pans without flow rate regulation
Suitable for people with reduced mobility.
30-year warranty.

## ADVANTAGES

- Total hygiene: operate without manual contact
- No cistern: no stagnant water
- Voluntary or automatic flush
- Cross wall installation

## TECHNICAL CHARACTERISTICS

**TEMPOMATIC direct flush valve - Ref. 463030**
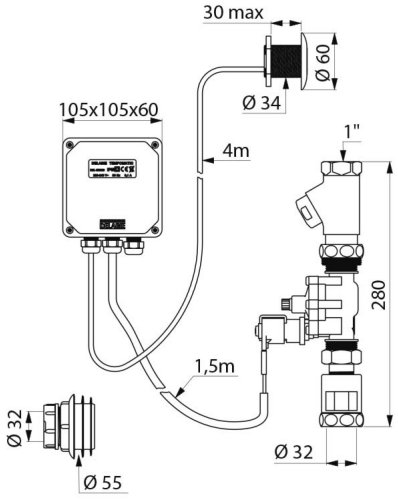
| | |
|---|---|
| Supply | 230/12V mains supply |
| Connector | 1" |
| Technology | Electronic |
| Length | 30mm |
| Norms | CE BELGAQUA |
| Warranty | 30 YEAR WARRANTY |
| Repairability | 50 YEARS REPAIRABILITY |