TEMPOMATIC direct flush valve

Ref. 463030

Direct flush WC valve

DESCRIPTION

TEMPOMATIC direct flush valve - Ref. 463030

Flush system without cistern: directly connected to pipework.
Mains supply with 1" solenoid valve.
230/12V transformer.
IP65 independent electronic unit.
For cross wall installation on walls ≤ 30mm.
Shock-resistant infrared presence detection sensor.
Contactless automatic flush when the user leaves or voluntary activation (when hand is detected ~4cm in front of the sensor).
Time flow ~7 seconds, can be adjusted from 3 - 12 seconds.
Detection distance, flow rate and flush volume can be adjusted.
Stopcock FF1".
Vacuum breaker Ø32mm
Connection washer Ø 32/55mm.
Wall plate flush to the wall.
Threaded rod can be cut to size.
Base flow rate: 1 L/sec at 1 bar dynamic pressure.
Compatible with rain water.
Suitable for rimless WC pans without flow rate regulation
Suitable for people with reduced mobility.
30-year warranty.

ADVANTAGES

- Total hygiene: operate without manual contact
- No cistern: no stagnant water
- Voluntary or automatic flush
- Cross wall installation

TECHNICAL CHARACTERISTICS

TEMPOMATIC direct flush valve - Ref. 463030
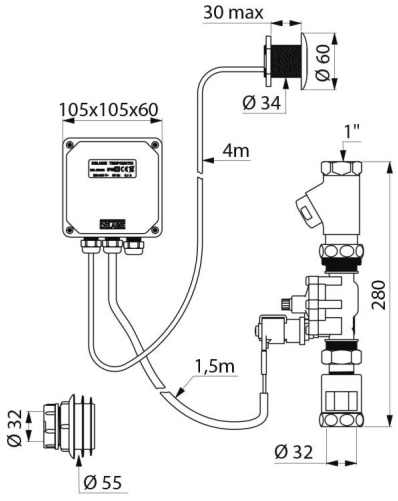
Supply	230/12V mains supply
Connector	1"
Technology	Electronic
Length	30mm
Norms	CE BELGAQUA
Warranty	30 YEAR WARRANTY
Repairability	50 YEARS REPAIRABILITY