

# Twin hole pre-rinse set with mixer

Ref. 5633

With bib tap and swivelling telescopic spout

## DESCRIPTION

**Twin hole pre-rinse set with mixer - Ref. 5633**

Complete pre-rinse set with bib tap suitable for intensive use in professional kitchens.

Deck-mounted twin hole mixer with 150mm centres with:

- valve heads with reinforced mechanisms with ergonomic control levers.

- offset inlet connections with M1/2" tails.

Bib tap with swivelling, tubular spout L. 200mm.

- 25 lpm full flow rate achieved within the first 90°.

- valve head with reinforced mechanism with ergonomic control lever.

Black hand spray with adjustable jet and 9 lpm flow rate at the outlet (ref. 433010).

Scale-resistant hand spray and shock-resistant tip.

Black reinforced, food-grade flexible hose L. 0.95m.

3/4" stainless steel column.

Adjustable wall bracket.

Stainless steel spring guide.


Twin hole pre-rinse set with 30-year warranty.

These pre-rinse models can be installed close to the splashback.

## TECHNICAL CHARACTERISTICS

**Twin hole pre-rinse set with mixer - Ref. 5633**

|                   |                                                                                                                                                                                                                                                                                                                                                 |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connector         | M1/2"                                                                                                                                                                                                                                                                                                                                           |
| Height            | 1125 - 1225 mm                                                                                                                                                                                                                                                                                                                                  |
| Drop height       | Bib tap: 300 mm, pull-out hand spray: 445-545 mm                                                                                                                                                                                                                                                                                                |
| Flow rate         | 25 lpm bib tap; 9 lpm via the hand spray                                                                                                                                                                                                                                                                                                        |
| Width to the wall | 35 - 162mm                                                                                                                                                                                                                                                                                                                                      |
| Finish            | Stainless steel                                                                                                                                                                                                                                                                                                                                 |
| Norms             |     |
| Warranty          |                                                                                                                                                                                                                                                              |
| Repairability     |                                                                                                                                                                                                                                                              |

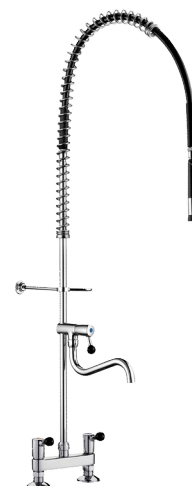

## ADVANTAGES



**Rapid fill:** full flow within the first 90°



**Anti-torsion** rotating nuts and PVC sheath



**Comfort:** ergonomic controls, swivelling spout



**Hygiene:** PVC flexible, scale-resistant spray

