


# Auto-rewind 304 stainless steel hose reel

Ref. 5675T2

With 15m flexible hose and hand spray

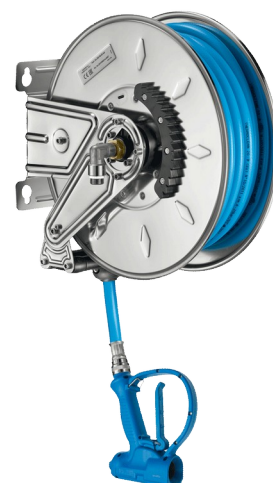

## DESCRIPTION

Auto-rewind 304 stainless steel hose reel - Ref. 5675T2

Auto-rewind hose reel with shock-resistant trigger-operated hand spray and flexible hose L. 15m with guide rollers:

Maximum temperature 50°C.

Flow rate 23 lpm at 3 bar.

Maximum pressure 20 bar, 12 bar with trigger-op hand spray.

Hose reel with 304 Stainless steel base and drum Ø 390mm.

Order separately: an angled stopcock with integrated vacuum breaker to prevent the back flow of polluted water into the mains supply.

Stainless steel hose reel with 30-year warranty.

## ADVANTAGES



Easy to clean: smooth surfaces




Stainless steel hose reel with hose lock



304 stainless steel: reduces bacterial development

## TECHNICAL CHARACTERISTICS

Auto-rewind 304 stainless steel hose reel - Ref. 5675T2

Connector	3/4"
Height	400mm
Depth	410mm
Length	186mm
Flow rate	14 lpm
Finish	304 Stainless steel
Warranty	
Repairability	