

SECURITHERM time flow shower panel

Ref. 792314

Time flow thermostatic

DESCRIPTION

SECURITHERM time flow shower panel - Ref. 792314

Thermostatic time flow shower panel:
Large model satin stainless steel shower panel for wall-mounted, exposed installation.
Concealed inlet via flexibles M $\frac{1}{2}$ ".
SECURITHERM thermostatic shower mixer.
Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.
Anti-scalding failsafe: automatic shut-off if cold water fails.
Anti-cold showers function: automatic shut-off if hot water fails.
Thermal shocks are possible.
Soft-touch operation.
Chrome-plated, tamperproof, scale-resistant, fixed, ROUND shower head with automatic flow rate regulation.
Time flow ~30 seconds.
Flow rate 6 lpm at 3 bar.
Integrated soap dish.
M $\frac{1}{2}$ " stopcocks.
Concealed fixings.
Filters and non-return valves.
Shower panel suitable for people with reduced mobility.
30-year warranty.

TECHNICAL CHARACTERISTICS


SECURITHERM time flow shower panel - Ref. 792314

Connector	M1/2"
Technology	Time flow
Height	1220mm
Depth	100mm
Width	250mm
Flow rate	6 lpm
Temperature limiter	Thermostatic
Finish	Stainless steel
Norms	   



ADVANTAGES

-  Thermostatic control
-  Instant shut-off if cold water fails
-  80% water savings
-  Stainless steel panel, brass controls

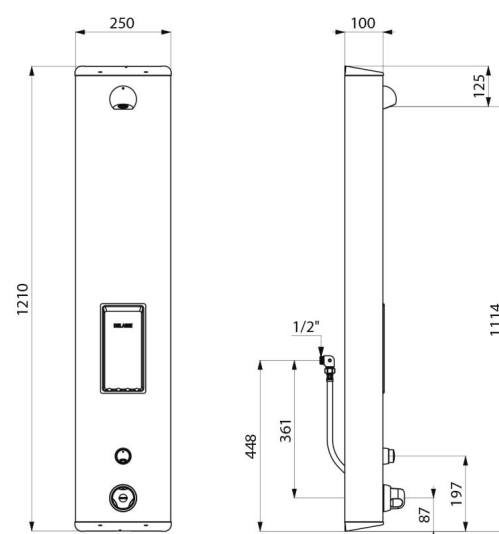

Warranty

