

SECURITHERM thermostatic basin mixer

Ref. H96001

Single control thermostatic sequential mixer H. 95mm L. 120mm

DESCRIPTION

SECURITHERM thermostatic basin mixer - Ref. H96001

Deck-mounted SECURITHERM thermostatic basin mixer.
Thermostatic sequential mixer: opens and closes with cold water.
No risk of cross flow between hot and cold water.
No non-return valves on the inlets.
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
Single hole mixer with straight spout H. 95mm L. 120mm and fitted with a hygienic flow straightener with no water retention and able to withstand thermal shocks.
Scale-resistant sequential thermostatic cartridge for single lever control of flow rate and temperature.
Temperature control from cold water up to 40°C with maximum temperature limiter set at 40°C.
Thermal or chemical shocks are possible.
Body and spout with smooth interiors and low water volume.
Flow rate limited to 5 lpm at 3 bar.
No manual contact thanks to Hygiene control lever L. 146mm.
No pop-up waste.
F3/8" PEX flexibles.
Reinforced fixing via 2 stainless steel rods.
Mixer ideal for healthcare facilities, nursing homes, hospitals and clinics.
Mixer suitable for people with reduced mobility.
Mixer with 30-year warranty.
Also available with copper tails.





TECHNICAL CHARACTERISTICS


SECURITHERM thermostatic basin mixer - Ref. H96001

Connector	F3/8"
Technology	SECURITHERM Securitouch sequential mixer
Height	95mm
Drop height	85mm
Spout length	120mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass



ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Securitouch: thermal insulation prevents burns

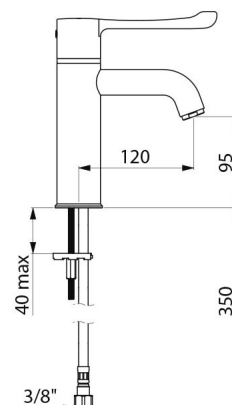

Norms	<div>ACS</div> <div></div> <div></div>
Warranty	<div>30 YEAR WARRANTY</div>
Repairability	<div>50 YEARS REPAIRABILITY</div>