

# BIOSAFE mechanical basin mixer

Ref. 2620

Single hole mechanical mixer with no spout, H. 95mm L. 110mm



## DESCRIPTION

### BIOSAFE mechanical basin mixer - Ref. 2620

Deck-mounted mechanical basin mixer.  
 Single hole mechanical mixer H. 95mm L. 110mm.  
 No spout: hygienic flow straightener integrated into the body.  
 Securitouch thermal insulation prevents burns.  
 Ø 35mm ceramic cartridge with pre-set maximum temperature limiter.  
 No risk of cross flow between the hot and cold water.  
 No non-return valves on the inlets.  
 Thermal shocks are possible without removing the control lever or shutting off the cold water supply.  
 Body with smooth interior and very low water volume (reduces bacterial development).  
 Flow rate set at 4 lpm.  
 Solid control lever.  
 Ergonomic, brass pop-up waste 1 1/4".  
 PEX flexibles F3/8" with rotating unions.  
 Fixing reinforced by two stainless steel rods.  
 Mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
 Suitable for people with reduced mobility.  
 Mixer with 30-year warranty.


## TECHNICAL CHARACTERISTICS

### BIOSAFE mechanical basin mixer - Ref. 2620

Connector	F3/8"
Technology	BIOSAFE mechanical mixer
Height	180mm
Length	220mm
Drop height	95mm
Spout length	110mm
Flow rate	5 lpm
Temperature limiter	Yes
Norms	ACS NF B205
Warranty	30 YEAR WARRANTY

## ADVANTAGES

-  Hygiene: body with very low water volume
-  Maximum hygiene: No spout
-  Thermal shocks are possible
-  Pre-set maximum temperature limiter

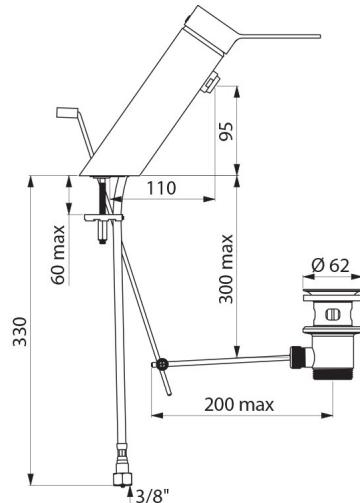

---

Repairability

---

