

SECURITHERM Securitouch autodraining thermostatic shower kit

Ref. H9769HYG

SECURITHERM Securitouch auto-draining thermostatic shower kit

DESCRIPTION

SECURITHERM Securitouch autodraining thermostatic shower kit - Ref. H9769HYG

SECURITHERM dual control thermostatic shower kit with auto-draining device:

- Shower mixer with scale-resistant thermostatic cartridge:
No risk of cross flow between the hot and cold water supplies.
Thermostatic mixer with no non-return valves (less bacterial proliferation).
Mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.

Prevents cold showers: shuts off automatically if hot water supply fails.

Securitouch thermal insulation prevents burns.

Scale-resistant thermostatic cartridge for temperature adjustment.

¼-turn ceramic head for flow rate adjustment.

Temperature control up to 43°C.

Double temperature limiter: 1st limiter set at 41°C, 2nd limiter set at 43°C.

Thermal shocks are possible without removing the control knob or shutting off the cold water supply.

Flow rate limited to 9 lpm at 3 bar.

Ergonomic controls.

M½" shower outlet.

F¾" inlets with integrated filters.

Mixer with 2 offset STOP/CHECK wall connectors M½" M¾", ideal for hospitals.

- Shower head (ref. 813) and adjustable, wall-mounted, chrome-plated support (ref. 845).

- Auto-draining device FM½" fits between the mixer outlet and the flexible hose, automatically drains the flexible and the shower head (ref. 880).

Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Mixer suitable for people with reduced mobility.

Mixer with 30-year warranty.

30-year warranty.

TECHNICAL CHARACTERISTICS

SECURITHERM Securitouch autodraining thermostatic shower kit - Ref. H9769HYG

Connector	M1/2"
Technology	SECURITHERM Securitouch thermostatic mixer, no non-return valves
Depth	95 mm
Length	260mm
Flow rate	9 lpm at 3 bar
Temperature limiter	Yes



ADVANTAGES



SECURITHERM: Anti-scalding safety




Maximum hygiene: no non-return valves



Securitouch thermal insulation prevents burns



Thermostatic: total temperature stability

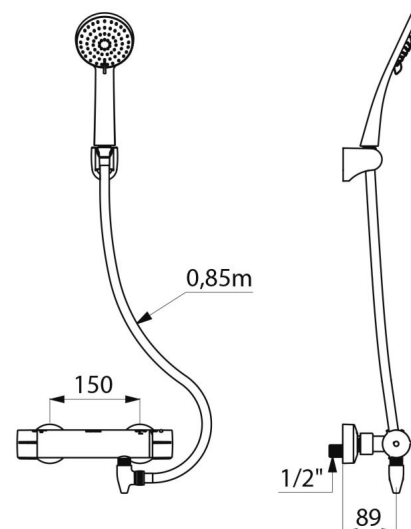

Finish	Chrome-plated brass
Norms	ACS 
Warranty	