

SECURITHERM EP pressure-balancing basin mixer

Ref. 2446LEP

Wall-mounted mixer with swivelling spout L. 150, Hygiene lever L. 150



DESCRIPTION

SECURITHERM EP pressure-balancing basin mixer - Ref. 2446LEP

Wall-mounted SECURITHERM pressure balancing (EP) basin mixer.
Wall-mounted mixer with flat, swivelling under spout L. 150mm with hygienic flow straightener suitable for fitting a BIOFIL terminal filter.

Anti-scalding safety: HW flow is reduced if CW supply fails (and vice versa).
Stable temperature regardless of pressure and flow rate variations in the system.

Securitouch thermal insulation prevents burns.

Ø 40mm pressure-balancing ceramic cartridge and pre-set maximum temperature limiter.

Body and spout with smooth interiors and low water volume (reduces bacterial development).

Flow rate regulated at 5 lpm.

Chrome-plated brass body.

Hygiene control lever L. 150mm.

Mixer supplied with offset STOP/CHECK connectors M1/2" M3/4" suitable for use in hospitals.

Recommended installation height: 110 - 200mm above the basin.

Mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Mixer suitable for people with reduced mobility.

Mixer with 30-year warranty.

TECHNICAL CHARACTERISTICS

SECURITHERM EP pressure-balancing basin mixer - Ref. 2446LEP

Connector	M1/2"
Technology	SECURITHERM EP mixer, Securitouch
Spout length	150mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass

Norms	   
Warranty	

ADVANTAGES



EP: HW flow rate reduced if CW fails




Securitouch thermal insulation prevents burns



EP: prevention of pressure variations



Hygiene: smooth interior reduces bacteria

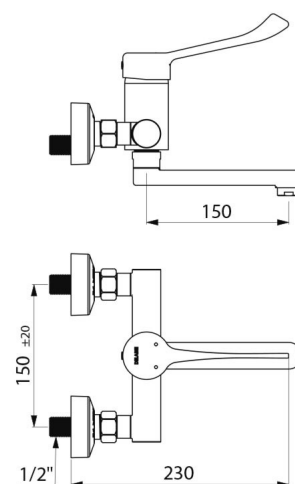

Repairability

