SECURITHERM EP pressure-balancing basin mixer

Ref. 2446LEP

Wall-mounted mixer with swivelling spout L. 150, Hygiene lever L. 150

DESCRIPTION

SECURITHERM EP pressure-balancing basin mixer - Ref. 2446LEP

Wall-mounted SECURITHERM pressure balancing (EP) basin mixer.
Wall-mounted mixer with flat, swivelling under spout L. 150mm with hygienic flow straightener suitable for fitting a BIOFIL terminal filter.
Anti-scalding safety: HW flow is reduced if CW supply fails (and vice versa).
Stable temperature regardless of pressure and flow rate variations in the system.
Securitouch thermal insulation prevents burns.
Ø 40mm pressure-balancing ceramic cartridge and pre-set maximum temperature limiter.
Body and spout with smooth interiors and low water volume (reduces bacterial development).
Flow rate regulated at 5 lpm.
Chrome-plated brass body.
Hygiene control lever L. 150mm.
Mixer supplied with offset STOP/CHECK connectors M1/2" M3/4" suitable for use in hospitals.
Recommended installation height: 110 - 200mm above the basin.
Mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Mixer suitable for people with reduced mobility.
Mixer with 30-year warranty.

ADVANTAGES

- EP: HW flow rate reduced if CW fails
- Securitouch thermal insulation prevents burns
- EP: prevention of pressure variations
- Hygiene: smooth interior reduces bacteria

TECHNICAL CHARACTERISTICS

SECURITHERM EP pressure-balancing basin mixer - Ref. 2446LEP

Connector	M1/2"
Technology	SECURITHERM EP mixer, Securitouch
Spout length	150mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	ACS, BELGAQUA, WRAS, DVGW
Warranty	30 YEAR WARRANTY

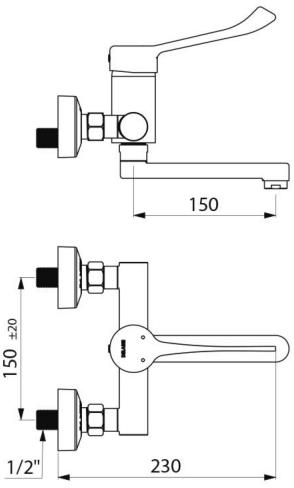

Repairability	