TEMPOMATIC WC direct flush valve

Ref. 463030HK

Electronic mains supply - sea water compatible

DESCRIPTION

TEMPOMATIC WC direct flush valve - Ref. 463030HK

Flush system without cistern: directly connected to pipework.
Mains supply with 1" solenoid valve.
230/12V transformer.
IP65 electronic housing unit.
For cross wall installation on walls ≤ 30mm.
Shock-resistant infrared presence detection sensor.
Voluntary activation (when hand is detected ~10cm in front of the sensor) or automatic flush when the user leaves.
Time flow ~7 seconds can be adjusted from 3 - 12 seconds.
Detection distance, flow rate and flush volume can be adjusted.
Connection washer Ø 32/55mm.
Wall plate flush to the wall.
Threaded rod can be cut to size.
Base flow rate: 1 L/sec.
Suitable for rimless WC pans.
Sea water compatible.
30-year warranty.

ADVANTAGES

- Total hygiene: no manual contact
- No cistern: no water stagnation
- Voluntary or automatic flush
- Cross wall installation

TECHNICAL CHARACTERISTICS

TEMPOMATIC WC direct flush valve - Ref. 463030HK
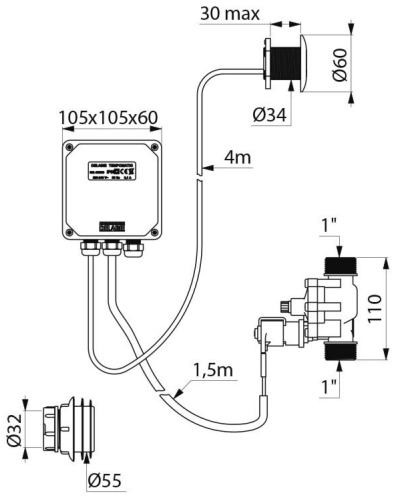
Supply	Mains supply 230/12V
Connector	1"
Technology	Electronic
Length	30mm
Norms	
Warranty	
Repairability