

# SECURITHERM thermostatic sink mixer

Ref. H9612

Single hole thermostatic mixer with retracting hand spray

## DESCRIPTION

SECURITHERM thermostatic sink mixer - Ref. H9612

Deck-mounted SECURITHERM thermostatic basin mixer, ideal for baby baths. Sequential thermostatic mixer: opens and closes with cold water. No risk of cross flow between the hot and cold water. No non-return valves on the inlets. Anti-scalding failsafe: immediate shut-off if cold or hot water supply fails. Securitouch thermal insulation prevents burns. Single hole mixer with swivelling outlet H. 110mm L. 200mm. Sequential mixer with retracting hand spray with 2 jet options: flow straightener/rain effect. Scale-resistant sequential thermostatic cartridge for sequential control of the flow rate and temperature. Temperature control from cold water up to 40°C with maximum temperature limiter set at 40°C. Body with smooth interior. Flow rate regulated at 4 lpm. No manual contact thanks to Hygiene control lever L. 100mm. BIOSAFE flexible shower hose reduces bacterial proliferation: transparent polyurethane, smooth interior and exterior. Flexible with narrow interior Ø 6mm: low water volume. Specific counterweight. PEX flexibles F3/8". Fixing reinforced by 2 stainless steel rods. Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics. Mixer suitable for people with reduced mobility. 30-year warranty.

## TECHNICAL CHARACTERISTICS

SECURITHERM thermostatic sink mixer - Ref. H9612

|                     |                                          |
|---------------------|------------------------------------------|
| Connector           | F3/8"                                    |
| Technology          | SECURITHERM Securitouch sequential mixer |
| Drop height         | 110mm                                    |
| Spout length        | 200mm                                    |
| Flow rate           | 4 lpm                                    |
| Temperature limiter | Yes                                      |
| Finish              | Chrome-plated brass                      |



## ADVANTAGES



Sequential: opens/closes with cold water




Hygiene: no non-return valves



SECURITHERM: Optimal anti-scalding safety



Hygiene: transparent flexible with smooth interior

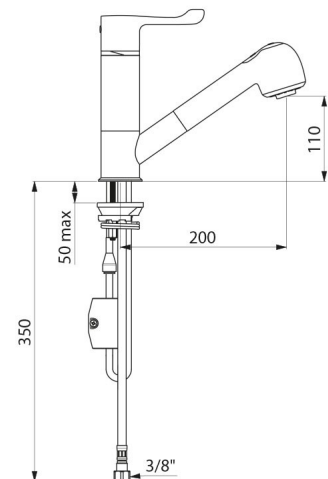

|               |                                                                                                                                                                                                                                                       |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Norms         |    |
| Warranty      |                                                                                                                                                                      |
| Repairability |                                                                                                                                                                      |