

SECURITHERM shower panel

Ref. 792413CF

Electronic thermostatic battery-operated

DESCRIPTION

SECURITHERM shower panel - Ref. 792413CF

SECURITHERM electronic thermostatic shower panel:
 Large model stainless steel panel for wall-mounted, exposed installation.
 Concealed inlet via flexibles M $\frac{1}{2}$ ".
 SECURITHERM thermostatic shower mixer.
 Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.
 Anti-scalding failsafe: automatic shut-off if cold water fails.
 Anti-cold showers function: automatic shut-off if hot water fails.
 Thermal shocks are possible.
 Battery-operated with CR-P2 223 6V Lithium battery.
 Shower starts when hand is 4cm from the infrared sensor.
 Shuts off voluntarily or automatically after ~60 seconds.
 Duty flush (~60 seconds every 24 hours after last use).
 Flow rate 6 lpm at 3 bar.
 Chrome-plated, tamperproof ROUND shower head with scale-resistant nozzle and automatic flow rate regulation.
 Concealed fixings.
 Filters and non-return valves.
 M $\frac{1}{2}$ " stopcocks.
 Electronic shower panel suitable for people with reduced mobility.
 30-year warranty.

TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref. 792413CF

Supply	6V battery
Connector	M $\frac{1}{2}$ "
Technology	Electronic
Height	1220mm
Depth	100mm
Width	250mm
Flow rate	6 lpm
Temperature limiter	Thermostatic
Finish	Stainless steel
Norms	ACS



ADVANTAGES



Total hygiene: operate without manual contact




Duty flush prevents bacterial proliferation



Thermostatic temperature regulation



Immediate shut-off if cold water fails

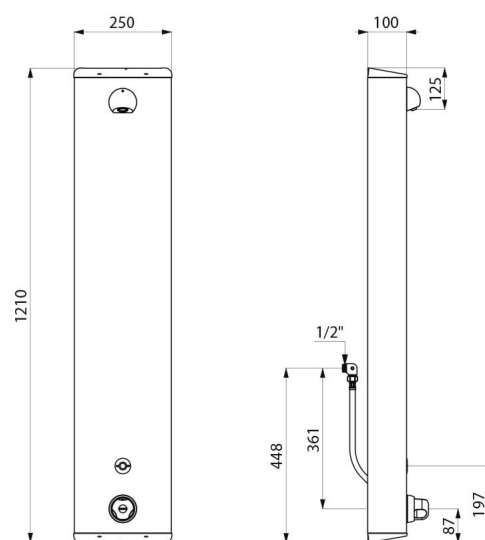

Warranty

