

Securitouch mechanical shower mixer

Ref. 2739TS

Wall-mounted single control mixer, solid lever







DESCRIPTION

Securitouch mechanical shower mixer - Ref. 2739TS

Wall-mounted single control mechanical shower mixer.
 Wall-mounted single control mixer with Securitouch thermal insulation to prevent burns.
 Ø 40mm classic ceramic cartridge with pre-set maximum temperature limiter.
 Body with smooth interior and low water volume.
 Flow rate regulated at 9 lpm.
 Chrome-plated brass body and solid control lever.
 M1/2" shower outlet with integrated non-return valve.
 Mixer with offset standard connectors M1/2" M3/4".
 Shower mixer ideal for healthcare facilities, nursing homes, hospitals and clinics.
 Shower mixer suitable for people with reduced mobility.
 Mixer with 30-year warranty.

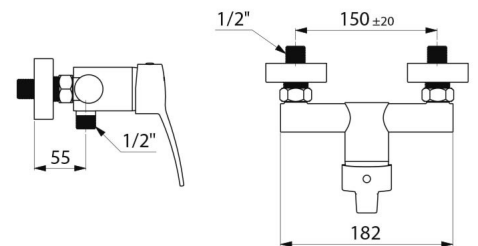
ADVANTAGES







-  Hygiene: smooth interior reduces bacteria
-  Securitouch thermal insulation prevents burns
-  Maximum hygiene: low water volume.
-  Ergonomic: solid lever is easy to grip

TECHNICAL CHARACTERISTICS

Securitouch mechanical shower mixer - Ref. 2739TS

| | |
|---------------------|--------------------------|
| Connector | M1/2" |
| Technology | Securitouch shower mixer |
| Width | 182mm |
| Flow rate | 9 lpm |
| Temperature limiter | Yes |
| Finish | Chrome-plated brass |



| | |
|---------------|---|
| Norms |     |
| Warranty |  |
| Repairability |  |