


# TEMPOMIX 3 time flow mixer

Ref. 794055

Soft-touch operation

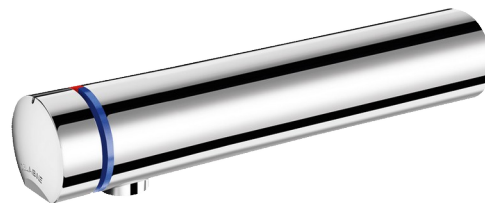

## DESCRIPTION

**TEMPOMIX 3 time flow mixer - Ref. 794055**

Wall-mounted single control time flow basin mixer, Kit 2/2:  
 Soft-touch operation.  
 Temperature control and operation via the push-button.  
 Time flow pre-set at ~7 seconds.  
 Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 - 6 lpm.  
 Tamperproof, scale-resistant flow straightener.  
 Chrome-plated solid brass body L. 190mm.  
 Wall-mounted M $\frac{1}{2}$ ".  
 Top or bottom supply.  
 Recessed inlets.  
 Filters and non-return valves.  
 Adjustable maximum temperature limiter.  
 Suitable for people with reduced mobility.  
 30-year warranty.  
 To order with inlet reference 794012.

## ADVANTAGES



Exceptional water savings: 85%









Soft-touch operation



Sleek design

## TECHNICAL CHARACTERISTICS

**TEMPOMIX 3 time flow mixer - Ref. 794055**

Connector	M $\frac{1}{2}$ "
Technology	Time flow
Spout length	190mm
Flow rate	3 lpm
Norms	     
Warranty	