Auto-rewind hose reel

Ref. 5676T2

With 15m flexible hose and hand spray

DESCRIPTION

Auto-rewind hose reel - Ref. 5676T2

Auto-rewind hose reel with shock-resistant trigger-operated hand spray and flexible hose L. 15m with guide rollers:
Maximum temperature 70°C.
Flow rate 23 lpm at 3 bar.
Maximum pressure 20 bar, 12 bar with trigger-op hand spray.
Hose reel with ABS drum Ø 425mm.
304 Stainless steel bracket.
Order separately: an angled stopcock with integrated vacuum breaker to prevent the back flow of polluted water into the mains supply.
Hose reel with 30-year warranty.

ADVANTAGES

- Easy to clean: smooth surfaces
- Stainless steel hose reel with hose lock

TECHNICAL CHARACTERISTICS

Auto-rewind hose reel - Ref. 5676T2
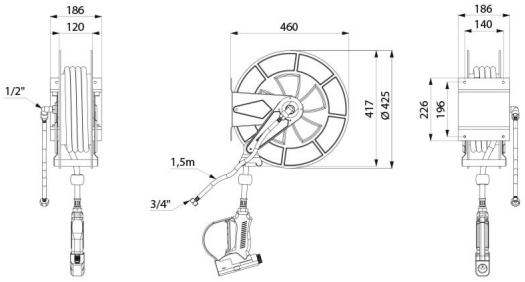
Connector	3/4"
Height	417mm
Depth	460mm
Length	186mm
Finish	ABS
Warranty	30 YEAR WARRANTY
Repairability	50 YEARS REPAIRABILITY