SECURITHERM EP pressure-balancing basin mixer

Ref. 2445EP

Wall-mounted mixer with swivel spout L .200mm, sculptured lever

DESCRIPTION

SECURITHERM EP pressure-balancing basin mixer - Ref. 2445EP

Wall-mounted SECURITHERM pressure-balancing basin mixer.
Mechanical mixer with flat, swivelling under spout, L. 200mm with hygienic flow straightener.
Spout suitable for fitting a BIOFUL point-of-use filter.
Anti-scalding safety: HW flow is reduced if CW fails (and vice versa).
Stable temperature regardless of pressure and flow rate variations in the system.
Mixer with Securitouch thermal insulation prevents burns.
Ø 40mm pressure-balancing ceramic cartridge with pre-set maximum temperature limiter.
Body and spout with smooth interiors and low water volume.
Flow rate regulated at 5 lpm at 3 bar.
Chrome-plated brass body.
Sculptured control lever.
Mixer with 150mm centres supplied with offset STOP/CHECK connectors M1/2" M3/4" ideal for hospitals.
Filters and non-return valves.
Recommended installation height: 110 - 200mm above the basin surface.
Mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Mixer suitable for people with reduced mobility.
Wall-mounted mixer with 30-year warranty.

ADVANTAGES

- Pressure-balancing: HW flow reduced if CW fails
- Securitouch thermal insulation prevents burns
- EP: reduces pressure variations
- Hygiene: smooth interior reduces bacteria

TECHNICAL CHARACTERISTICS

SECURITHERM EP pressure-balancing basin mixer - Ref. 2445EP

Connector	M1/2"
Technology	SECURITHERM EP mixer, Securitouch
Spout length	200mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated
Norms	ACS, BELGAQUA, WRAS, DVGW
Warranty	30 YEAR WARRANTY



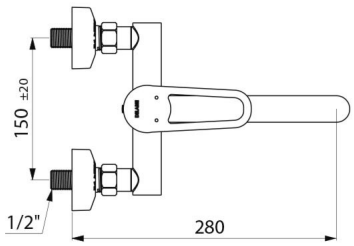

Repairability	