


TEMPOMATIC 3 electronic tap

Ref. 443016

Integrated battery

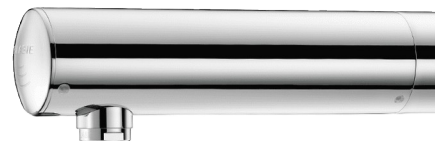

DESCRIPTION

TEMPOMATIC 3 electronic tap - Ref. 443016

Electronic basin tap for panels:

Battery-operated with integrated 223 6V Lithium batteries.

Reduced-stagnation solenoid valve and electronic unit integrated into the body of the tap.

Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 - 6 lpm.

Scale-resistant flow straightener.

Duty flush (~60 seconds every 24 hours after last use).

Active, infrared presence detection, sensor at the end of the spout optimises detection.

Chrome-plated solid brass body.

Cap fixed in place by 2 concealed screws, with pictogram to identify the sensor easily.

For installation on panels from 1 to 4mm.

Ø 50mm, L. 190mm.

Anti-blocking security.

Suitable for people with reduced mobility.

30-year warranty.

ADVANTAGES



Total hygiene: no manual contact



90% water savings



Battery integrated in the tap body



Anti-bacterial proliferation duty flush

TECHNICAL CHARACTERISTICS

TEMPOMATIC 3 electronic tap - Ref. 443016

Supply	6V battery
Connector	M1/2"
Technology	Electronic
Spout length	190mm
Flow rate	3 lpm
Norms	ACS 
Warranty	

