

# TEMPOMATIC 4 urinal valve

Ref. 479416

Electronic with integrated batteries

## DESCRIPTION

TEMPOMATIC 4 urinal valve - Ref. 479416

Exposed electronic urinal valve with integrated batteries:  
 Battery-operated with integrated CR 123 6V Lithium batteries.  
 For wall-mounted, exposed installation.  
 Reduced-stagnation solenoid valve and electronic unit integrated into the valve body.  
 Shockproof infrared presence detection sensor.  
 Detection delay is 10 sec.  
 3 programmes (rinsing volume adjustable in accordance to the type of urinal).  
 High-frequency mode (exclusive to DELABIE):  
 - short rinse after each user  
 - complementary rinse after busy period.  
 Hygienic duty flush, every 24hr after last use, prevents vacuums in the siphon.  
 Compatible with rain water.  
 Flow rate 0.15 L/sec. at 3 bar, can be adjusted.  
 Integrated stopcock and flow rate adjuster.  
 One-piece chrome-plated metal body.  
 M $\frac{1}{2}$ " connection.  
 Angled for recessed supply with Ø 35mm neck tube.  
 For non-standard urinals: 30mm gap from wall.  
 Suitable for people with reduced mobility.  
 30-year warranty.

Ideal for replacing old installations:  
 Can easily be installed where there was previously a time flow urinal.

## TECHNICAL CHARACTERISTICS

TEMPOMATIC 4 urinal valve - Ref. 479416

|                   |                   |
|-------------------|-------------------|
| Supply            | 6V batteries      |
| Connector         | M $\frac{1}{2}$ " |
| Technology        | Electronic        |
| Height            | 450mm             |
| Depth             | 85mm              |
| Flow rate         | 0.15 l/sec        |
| Width to the wall | 50mm              |
| Norms             | CE                |



## ADVANTAGES



Total hygiene: no manual contact




High-frequency mode



Batteries integrated into the valve body



Hygienic duty flush

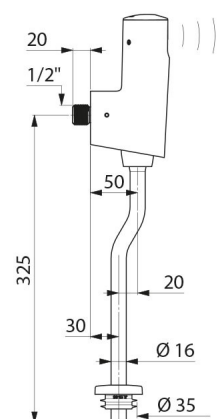

Warranty

