

# SPORTING 2 SECURITHERM electronic shower panel

Ref. 714910

Mains, thermostatic, rain-effect spray, kit 2/2

## DESCRIPTION

**SPORTING 2 SECURITHERM electronic shower panel - Ref. 714910**

SPORTING 2 SECURITHERM, thermostatic electronic shower panel:  
Recessed inlets.

Anodised aluminium and chrome-plated satin finish panel.

Mains supply 230/6V.

Infrared presence detection. Shower starts when hand is moved towards the sensor (detection distance ~4cm).

Shuts off voluntarily or automatically after ~60 seconds.

Duty flush (~60 seconds every 24 hours after the last use).

Flow rate 6 lpm at 3 bar, comfortable rain-effect spray.

Tamperproof, fixed shower head with automatic flow rate regulation.

Accessible filters and non-return valves.

Integrated stopcocks.

M $\frac{1}{2}$ " connections (compact nanny joint, kit 1/2).

Electronic shower panel suitable for people with reduced mobility.

30-year warranty.

SECURITHERM technology:

Thermostatic shower mixer directly integrated in the head of the shower panel.

Temperature set by the installer.

Stable temperature, pre-set at 38°C.

Anti-scalding failsafe: automatic shut-off if the cold water fails.

Prevents cold showers: automatic shut-off if the hot water fails.

Order with nanny joint reference 714012.

## TECHNICAL CHARACTERISTICS

**SPORTING 2 SECURITHERM electronic shower panel - Ref. 714910**

Supply	Mains supply 230/6V
Connector	M $\frac{1}{2}$ "
Technology	Electronic
Height	1020mm
Depth	21mm
Width	70mm
Flow rate	6 lpm
Finish	Aluminium



## ADVANTAGES



Exceptional water savings: 80%




Anti-bacterial proliferation duty flush



Immediate shut-off if cold water fails



Sleek shapes, concealed fixings

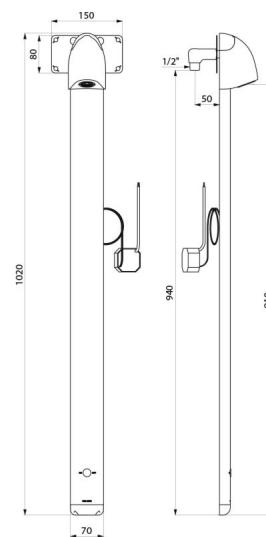

---

Norms

**ACS**



**CE**

---

Warranty

