

SECURITHERM EP pressure-balancing basin mixer

Ref. 2720LEP

Mechanical single hole mixer H. 95mm L. 120mm

DESCRIPTION

SECURITHERM EP pressure-balancing basin mixer - Ref. 2720LEP

Deck-mounted mechanical basin mixer with pressure-balancing. Single hole mixer with curved spout H. 95mm L. 120mm fitted with a hygienic flow straightener.

Spout suitable for fitting a BIOFIL point-of-use filter.

Ø 35mm ceramic cartridge with pressure-balancing and a pre-set maximum temperature limiter.

Total anti-scalding safety: HW flow rate reduced if CW supply fails (and vice versa).

Stable temperature regardless of pressure and flow rate variations in the system.

Body and spout with smooth interiors and low water volume.

No risk of cross flow between the hot and cold water.

No non-return valves on the inlets.

Flow rate regulated at 5 lpm at 3 bar.

Hygiene control lever L. 150mm.

Ergonomic, brass pop-up waste 1 1/4".

F3/8" PEX flexibles with filters and non-return valves.

Fixing reinforced via 2 stainless steel rods.

Mechanical mixer with SECURITHERM EP pressure-balancing ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Single hole mixer suitable for people with reduced mobility.

Mixer with 30-year warranty.

TECHNICAL CHARACTERISTICS

SECURITHERM EP pressure-balancing basin mixer - Ref. 2720LEP

| | |
|---------------------|---------------------------------|
| Connector | F3/8" |
| Technology | SECURITHERM EP mechanical mixer |
| Drop height | 95mm |
| Spout length | 120mm |
| Flow rate | 5 lpm at 3 bar |
| Temperature limiter | Yes |
| Finish | Chrome-plated stainless steel |



ADVANTAGES



HW flow rate reduced if CW fails




EP: reduces temperature variations



Hygiene: smooth interior reduces bacteria



Maximum hygiene: low water volume

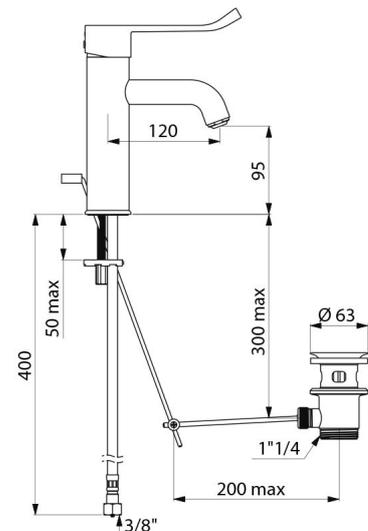

Norms

ACS



WRAS



Warranty



Repairability

