

# SECURITHERM Securitouch thermostatic shower mixer

Ref. H9741

Dual control thermostatic shower mixer



## DESCRIPTION

**SECURITHERM Securitouch thermostatic shower mixer - Ref. H9741**

SECURITHERM dual control thermostatic shower mixer.  
Mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.

Prevents cold showers: shuts off automatically if hot water supply fails.

Securitouch thermal insulation to prevent burns.

Scale-resistant thermostatic cartridge for temperature adjustment.

¼-turn ceramic head for flow rate adjustment.

Temperature control from 25 - 41°C.

Double temperature limiter: 1st limiter set at 38°C can be overridden, 2nd limiter set at 41°C.

Thermal shocks are easy to undertake without removing the control knob or shutting off the cold water supply.

Flow rate regulated at 9 lpm.

Chrome-plated brass body and ERGO controls.

M1/2" shower outlet.

F3/4" inlets with integrated filters and non-return valves.

Mixer with offset M1/2" M3/4" STOP/CHECK wall connectors.

Mixer ideal for healthcare facilities, retirement and care home, hospitals and clinics.


Mixer suitable for people with reduced mobility.

Shower mixer with 30-year warranty.

## TECHNICAL CHARACTERISTICS

**SECURITHERM Securitouch thermostatic shower mixer - Ref. H9741**

|                     |                                            |
|---------------------|--------------------------------------------|
| Connector           | M1/2"                                      |
| Technology          | SECURITHERM Securitouch thermostatic mixer |
| Depth               | 92mm                                       |
| Length              | 286mm                                      |
| Flow rate           | 9 lpm                                      |
| Temperature limiter | Yes                                        |
| Finish              | Chrome-plated brass                        |

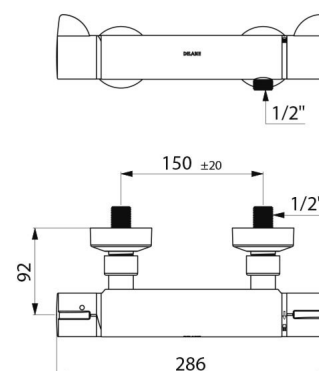

Norms

ACS



NF



DVGW



BELGAQUA

Warranty

