

# Sequential thermostatic shower mixer

Ref. H9630

Thermostatic mixer with no non-return valves, bottom outlet



## DESCRIPTION

**Sequential thermostatic shower mixer - Ref. H9630**

SECURITHERM thermostatic sequential shower mixer.  
Thermostatic sequential mixer: opens and closes with cold water.  
Mixer with no non-return valves on the inlets (reduces bacterial proliferation).  
No risk of cross flow between hot and cold water.  
Sequential mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.  
Prevents cold showers: shuts off automatically if hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Scale-resistant thermostatic sequential cartridge adjusts the flow rate and the temperature.  
Temperature control from cold water up to 39°C with maximum temperature limiter set at 39°C.  
Thermal shocks are possible.  
Body with smooth interior and low water volume (reduces niches where bacteria can develop).  
Flow rate regulated at 9 lpm.  
Chrome-plated brass body and Hygiene control lever L. 100mm.  
M1/2" bottom shower outlet.  
Wall-mounted mixer with offset STOP/CHECK connectors, M1/2" M3/4".  
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Sequential mixer suitable for people with reduced mobility.  
Mixer with 30-year warranty.


## ADVANTAGES

-  Sequential, opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Thermostatic: complete temperature stability

## TECHNICAL CHARACTERISTICS

**Sequential thermostatic shower mixer - Ref. H9630**

|                     |                                                       |
|---------------------|-------------------------------------------------------|
| Connector           | M1/2"                                                 |
| Technology          | SECURITHERM Securitouch sequential thermostatic mixer |
| Length              | 184mm                                                 |
| Flow rate           | 9 lpm                                                 |
| Temperature limiter | Yes                                                   |
| Finish              | Chrome-plated brass                                   |

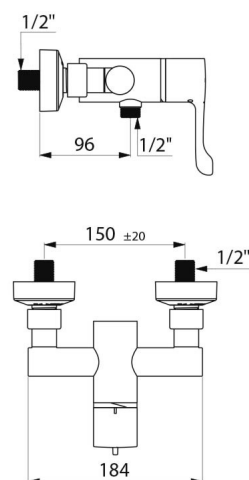

Norms



Warranty



Repairability

