

# BIOSAFE mechanical basin mixer

Ref. 2621

Single hole mechanical mixer with no spout, H. 95mm L. 110mm

## DESCRIPTION

**BIOSAFE mechanical basin mixer - Ref. 2621**

Deck-mounted mechanical basin mixer.  
Single hole mechanical mixer H. 95mm L. 110mm.  
No spout: hygienic flow straightener integrated into the body.  
Securitouch thermal insulation prevents burns.  
Ø 35mm ceramic cartridge with pre-set maximum temperature limiter.  
No risk of cross flow between the hot and cold water.  
No non-return valves on the inlets.  
Thermal shocks are possible without removing the control lever or shutting off the cold water supply.  
Mixer body with smooth interior and very low water volume (limits bacterial development).  
Flow rate set at 4 lpm.  
Solid control lever.  
No pop-up waste.  
PEX flexibles F3/8", rotating unions.  
Fixing reinforced by two stainless steel rods.  
Mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Single hole mixer suitable for people with reduced mobility.  
Mixer with 30-year warranty.  
Also available with copper tails.

## TECHNICAL CHARACTERISTICS

**BIOSAFE mechanical basin mixer - Ref. 2621**

|                     |                          |
|---------------------|--------------------------|
| Connector           | F3/8"                    |
| Technology          | BIOSAFE mechanical mixer |
| Height              | 180mm                    |
| Length              | 220mm                    |
| Drop height         | 95mm                     |
| Spout length        | 110mm                    |
| Flow rate           | 4 lpm                    |
| Temperature limiter | Yes                      |



## ADVANTAGES



Hygiene: body with very low water volume




Maximum hygiene: no spout



Thermal shocks are possible



Pre-set maximum temperature limiter

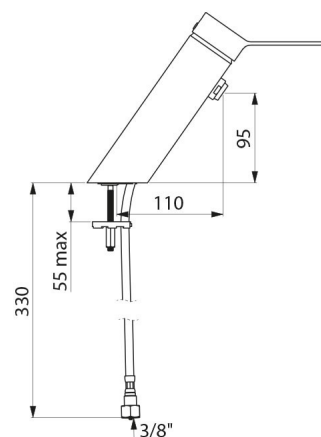

Norms

ACS



WRAS



Warranty



Repairability

