Deck-mounted single hole mixer - 60 lpm

Ref. 5650T3

Swivelling spout H. 355mm L. 300mm

DESCRIPTION

Deck-mounted single hole mixer - 60 lpm - Ref. 5650T3

Deck-mounted single hole catering mixer.
Swivelling tubular spout H. 355mm L. 300mm with hygienic flow straightener.
Ceramic cartridge Ø 45mm.
Flow rate 60 lpm at 3 bar.
Spout with smooth interior.
Slimline control lever.
Chrome-plated brass body and spout.
Soldered copper pipe water inlets.
Reinforced fixing.
30-year warranty.

ADVANTAGES

- Rapid fill: flow rate 60 lpm at 3 bar
- Body and spout suitable for professional use
- Hygiene: spout with smooth interior
- Reinforced fixing

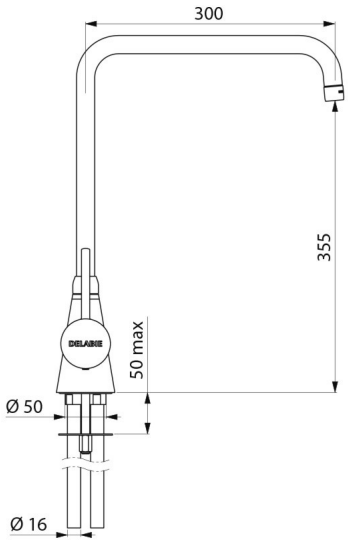

TECHNICAL CHARACTERISTICS

Deck-mounted single hole mixer - 60 lpm - Ref. 5650T3

Connector	Copper tails
Drop height	355mm
Spout length	300mm
Flow rate	60 lpm
Finish	Chrome-plated brass
Norms	ACS WRAS
Warranty	30 YEAR WARRANTY
Repairability	50 YEARS REPAIRABILITY