

# SECURITHERM thermostatic sequential sink mixer

Ref. H962015

Single hole thermostatic sequential mixer H. 160mm L. 140mm

## DESCRIPTION

**SECURITHERM thermostatic sequential sink mixer - Ref. H962015**

Deck-mounted SECURITHERM thermostatic sink mixer.  
Thermostatic sequential mixer: opens and closes with cold water.  
Single hole mixer with curved spout H. 160mm L. 140mm with hygienic flow straightener for no impurity retention and thermal shock-resistant.  
Anti-scalding failsafe: automatic shut-off if cold or hot water supply fails.  
Securitouch thermal insulation prevents burns.  
No risk of cross flow between hot and cold water.  
No non-return valves on the inlets.  
Scale-resistant thermostatic cartridge for single lever control of flow rate and temperature.  
Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.  
Tested without water to comply with NHS requirements. No pre-set temperature.  
Thermal or chemical shocks are possible.  
Body and spout with smooth interiors and low water volume.  
Flow rate regulated at 9 lpm.  
No manual contact thanks to Hygiene control lever L. 146mm.  
No pop-up waste.  
Supplied with stainless steel F3/8" PEX flexibles with chrome-plated brass stopcocks, filters and Ø 15mm conical inlets.  
Reinforced fixing via 2 stainless steel rods.  
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Suitable for people with reduced mobility.  
30-year warranty.  
Also available with copper tails.

## TECHNICAL CHARACTERISTICS


**SECURITHERM thermostatic sequential sink mixer - Ref. H962015**

|                     |                               |
|---------------------|-------------------------------|
| Supply              | 1/2", Ø 15mm                  |
| Technology          | Thermostatic sequential mixer |
| Drop height         | 160mm                         |
| Spout length        | 140mm                         |
| Flow rate           | 9 lpm                         |
| Temperature limiter | Yes                           |
| Finish              | Chrome-plated brass           |



## ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Thermostatic: total temperature stability

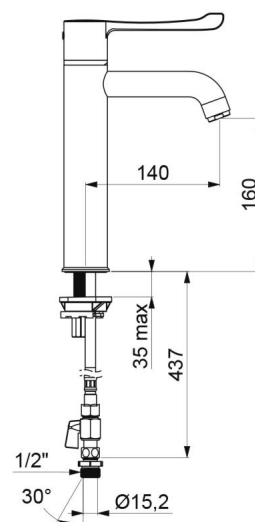

Warranty



Repairability

