TEMPOFIX 3 self-supporting frame system for WCs

Ref. 564005

For dual control TEMPOMATIC electronic mains supply valve - Ø 100mm

DESCRIPTION

TEMPOFIX 3 self-supporting frame system for WCs - Ref. 564005

Self-supporting frame system for wall-hung WCs, kit 1/2:
Black powder-coated steel frame:
- With large feet for fixing to load-bearing floors.
- Frame height can be adjusted from 0 - 200mm (with 1m mark).
- Compatible with solid walls from 10 - 120mm.
- Ø 32mm flush tube with Ø 55mm connection washer.
- PVC soil pipe, Ø 100mm outlet to glue to waterproof seal, with 2 setting positions.

Recessed waterproof housing: flush system without cistern, directly connected to pipework.
- Compatible with TEMPOMATIC dual control or TEMPOMATIC Connect electronic WC valve.
- Compatible with 230/6V mains supply.
- Backflow prevention device inside the housing.
- Integrated stopcock and flow rate regulation.

Supplied pre-mounted.
30-year warranty.
Order with control plate references 464000, 464050, 465000 or 465050.

ADVANTAGES

- Quick and easy to install: delivered pre-mounted
- Space-saving
- Adapt to wall thickness
- Compatible with mains supply

TECHNICAL CHARACTERISTICS

TEMPOFIX 3 self-supporting frame system for WCs - Ref. 564005
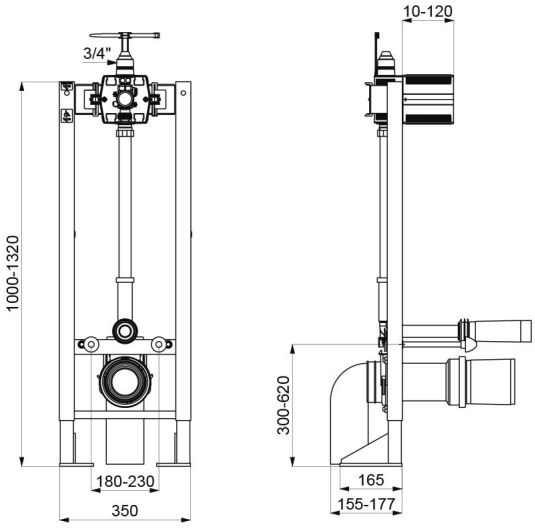
Connector	¾"
Technology	Electronic and time flow
Height	1000 to 1320mm
Depth	157 - 177mm
Width	350mm
Diameter	Ø 100mm outlet
Finish	Black powder-coated steel
Warranty	30 YEAR WARRANTY