# TEMPOFIX 3 wall-mounted frame system for WCs

Ref. 564060DE

For time flow or battery-operated electronic valve - Ø 110mm outlet

## DESCRIPTION

**TEMPOFIX 3 wall-mounted frame system for WCs - Ref. 564060DE**

Wall-mounted frame system for wall-hung WCs, kit 1/2:
Black powder-coated steel frame:
- For fixing to load-bearing walls.
- Frame height can be adjusted from 0 - 200mm (with 1m mark).
- Compatible with solid walls from 10 - 120mm.
- Ø 32mm flush tube with Ø 55mm connection washer.
- ABS soil pipe, Ø 110mm HDPE outlet with waterproof seal, with 2 setting positions.

Recessed waterproof housing: flush system without cistern, directly connected to pipework.
- Compatible with electronic or time flow valves for WCs.
- Compatible with CR123 Lithium 6V battery.
- Backflow prevention device inside the housing.
- Integrated stopcock and flow rate regulation.

Supplied pre-mounted.
30-year warranty.
Order with control plate references 464006, 465006, 763000, 763030, 763040 or 763041.

## ADVANTAGES

- Quick and easy to install: delivered pre-mounted
- Space-saving
- Adapt to wall thickness
- Compatible with 6V Lithium batteries

## TECHNICAL CHARACTERISTICS

**TEMPOFIX 3 wall-mounted frame system for WCs - Ref. 564060DE**
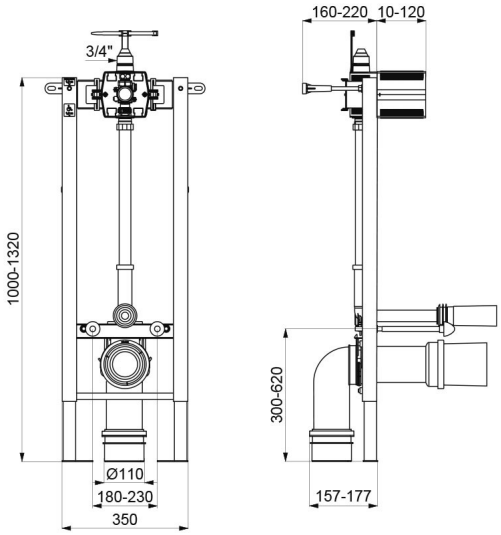
| | |
|---|---|
| Connector | ¾" |
| Technology | Electronic and time flow |
| Height | 1000 to 1320mm |
| Depth | 157 - 177mm |
| Width | 350mm |
| Diameter | Ø 110mm outlet |
| Finish | Black powder-coated steel |
| Warranty | 30 YEAR WARRANTY |