

# SECURITHERM BIOCLIP

## sequential thermostatic sink mixer

Ref. H96251

Removable sequential thermostatic mixer H. 160mm L. 140mm

### DESCRIPTION

**SECURITHERM BIOCLIP sequential thermostatic sink mixer - Ref. H96251**

Deck-mounted thermostatic SECURITHERM sink mixer.  
Sequential thermostatic mixer: opens and closes with cold water.  
No risk of cross flow between the hot and cold water.  
No non-return valves on the inlets.  
BIOCLIP: mixer is easy to remove for cleaning and disinfection.  
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Single hole mixer with curved spout H. 160mm L. 140mm fitted with a hygienic flow straightener with no impurity retention and thermal shock-resistant.  
Scale-resistant sequential thermostatic cartridge for single control of flow rate and temperature.  
Temperature adjusts from cold water up to 40°C with temperature limiter set at 40°C.  
Thermal and chemical shocks are possible.  
Body and spout with smooth interiors and low water volume.  
Flow rate 9 lpm at 3 bar.  
No manual contact thanks to Hygiene control lever L. 146mm.  
No pop-up waste.  
Supplied with F3/8" PEX flexibles.  
Fixing reinforced by 2 stainless steel rods.  
Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Sequential mixer suitable for people with reduced mobility.  
30-year warranty.  
Also available with copper tails.

### TECHNICAL CHARACTERISTICS


**SECURITHERM BIOCLIP sequential thermostatic sink mixer - Ref. H96251**

|                     |                                                                                     |
|---------------------|-------------------------------------------------------------------------------------|
| Supply              | 3/8"                                                                                |
| Technology          | Removable sequential thermostatic mixer                                             |
| Drop height         | 160mm                                                                               |
| Spout length        | 140mm                                                                               |
| Flow rate           | 9 lpm                                                                               |
| Temperature limiter | Yes                                                                                 |
| Finish              | Chrome-plated brass                                                                 |
| Warranty            |  |



### ADVANTAGES

-  Maximum hygiene: mixer has no non-return valves
-  Hygiene: can be removed for internal cleaning
-  SECURITHERM: optimal anti-scalding safety
-  Sequential: opens and closes with cold water

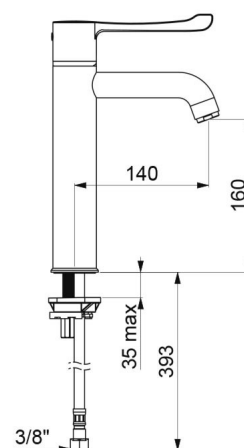

Repairability

