

TEMPOMATIC 4 recessed housing for showers

Ref. 443PBOX

Batteries, kit 1/2

DESCRIPTION


TEMPOMATIC 4 recessed housing for showers - [Ref. 443PBOX](#)

Waterproof recessed housing for TEMPOMATIC 4 for showers, kit 1/2: Collar with waterproof seal. Hydraulic connection from the outside and maintenance from the front. Adjusts to all types of installations (rails, solid walls, panels). Compatible with wall finishes 10 - 120mm (while maintaining the minimum recessing depth of 93mm). Stopcocks and flow rate adjustment, filters, non-return valves and cartridge are all integrated and accessible from the front. Supplied in 2 kits: secure system flush without sensitive elements. 30-year warranty. Order with control plate reference 443218.

TECHNICAL CHARACTERISTICS

TEMPOMATIC 4 recessed housing for showers - [Ref. 443PBOX](#)

Connector	1/2"
Technology	Electronic
Depth	10 - 120mm
Width	170mm
Norms	ACS
Warranty	30 YEAR WARRANTY

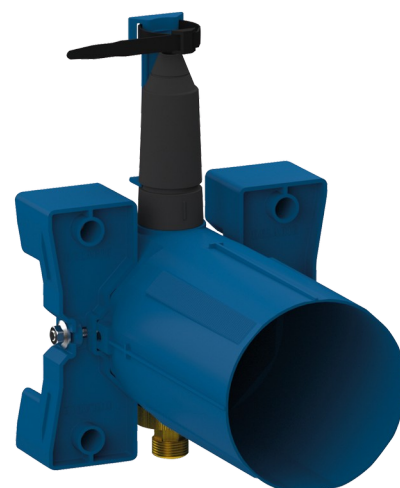

ADVANTAGES



Installation recessed in wall



Waterproof housing is adjustable and modular



System tested to over 500,000 operations



100% waterproof housing

