

BIOCLIP mechanical basin mixer

Ref. 2821L

Single hole removable mechanical mixer H.95mm L.120mm, Hygiene lever

DESCRIPTION

BIOCLIP mechanical basin mixer - Ref. 2821L

Deck-mounted mechanical basin mixer.
 BIOCLIP mechanical mixer: mixer can be removed entirely for cleaning and disinfection.
 Single hole mixer with spout H. 95mm L. 120mm fitted with a BIOSAFE hygienic flow straightener.
 Spout suitable for fitting a BIOFIL point-of-use filter.
 Ø 35mm ceramic cartridge with pre-set maximum temperature limiter.
 Thermal shocks are possible without removing the control lever or shutting off the cold water supply.
 Body and spout with smooth interiors and low water volume.
 Flow rate limited to 5 lpm at 3 bar.
 Hygiene control lever L. 150mm.
 Without pop-up waste.
 Supplied with PEX flexibles PEX F3/8" with stopcocks in chrome-plated brass.
 Fixing reinforced by 2 stainless steel rods.
 Mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
 Single hole mixer suitable for people with reduced mobility.
 Mixer with 30-year warranty.
 Also available with copper tails.

TECHNICAL CHARACTERISTICS

BIOCLIP mechanical basin mixer - Ref. 2821L

| | |
|---------------------|-------------------------|
| Connector | F3/8" |
| Technology | BIOCLIP removable mixer |
| Drop height | 95mm |
| Spout length | 120mm |
| Flow rate | 5 lpm at 3 bar |
| Temperature limiter | Yes |
| Finish | Chrome-plated brass |

Norms

ACS

WRAS



Warranty



ADVANTAGES



Hygiene: remove for internal cleaning




Hygiene: smooth interior reduces bacteria



Pre-set maximum temperature limiter



Hygiene lever: mixer requires manual contact

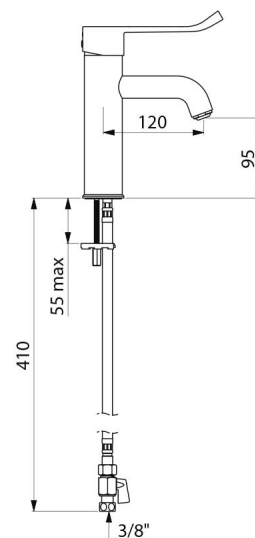

Repairability

