

Pressure-balancing mixer with retracting hand spray

Ref. 2211EP

Single hole mechanical EP mixer with retracting hand spray

DESCRIPTION

Pressure-balancing mixer with retracting hand spray - Ref. 2211EP

Deck-mounted mechanical sink mixer with pressure-balancing suitable for baby baths.
Single hole mixer with retracting hand spray with swivelling spout H. 105mm L. 200mm.
Ø 40mm ceramic cartridge with pressure-balancing and pre-set maximum temperature limiter.
Total anti-scalding safety: HW flow rate is reduced if CW supply fails (and vice versa).
Stable temperature regardless of variations in pressure and flow rate in the system.
Securitouch thermal insulation prevents burns.
Mechanical mixer with retracting hand spray with 2 jet options: flow straightener / rain effect.
Body with smooth interior.
Flow rate limited to 7 lpm at 3 bar.
Chrome-plated brass body and solid control lever.
BIOSAFE flexible shower hose reduces bacterial proliferation: transparent polyurethane to ensure replacement when biofilm is present, smooth interior and exterior.
Narrow flexible (interior Ø 6mm): low water volume.
Specific counterweight.
PEX flexibles F $\frac{3}{8}$ " with filters and non-return valves.
Fixing reinforced by 2 stainless steel rods.
Mechanical mixer with SECURITHERM pressure-balancing, ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
Mixer with 30-year warranty.

TECHNICAL CHARACTERISTICS

Pressure-balancing mixer with retracting hand spray - Ref. 2211EP

Connector	F3/8"
Technology	SECURITHERM EP mechanical mixer
Drop height	105mm
Spout length	200mm
Flow rate	7 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	ACS   



ADVANTAGES



HW flow rate reduced if CW fails




Hygiene: transparent flexible with smooth interior



Ergonomic: solid control lever is easy to grip



Comfort: retracting hand spray with 2 jets

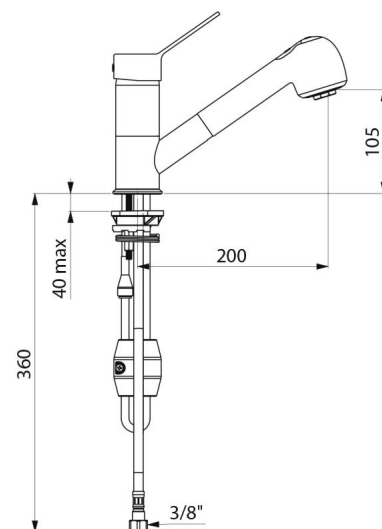

Warranty	
Repairability	