Securitouch mechanical shower mixer

Ref. 2739T

Wall-mounted single control mixer, solid control lever

DESCRIPTION

Securitouch mechanical shower mixer - Ref. 2739T

Wall-mounted single control mechanical shower mixer.
Wall-mounted single control with Securitouch thermal insulation to prevent burns.
Ø 40 classic ceramic cartridge with pre-set maximum temperature limiter.
Body with smooth interior and low water volume (reduces bacterial development).
No risk of cross flow between the hot and cold water.
No non-return valves on the inlets.
Flow rate regulated at 9 lpm.
Chrome-plated brass body and solid control lever.
M1/2" shower outlet with integrated non-return valve.
Mixer with offset STOP/CHECK connectors M1/2" M3/4".
Mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Shower mixer suitable for people with reduced mobility.
Mixer with 30-year warranty.

ADVANTAGES

- Hygiene: smooth interior reduces bacteria
- Securitouch thermal insulation prevents burns
- Maximum hygiene: low water volume.
- Ergonomic: solid lever is easy to grip

TECHNICAL CHARACTERISTICS

Securitouch mechanical shower mixer - Ref. 2739T
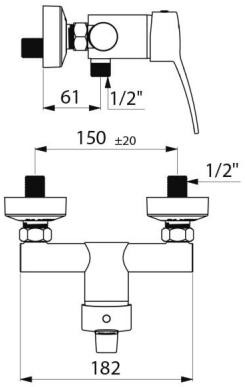
Connector	M1/2"
Technology	Securitouch shower mixer
Width	182mm
Flow rate	9 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	ACS, WRAS, NF
Warranty	30 YEAR WARRANTY
Repairability	50 YEARS REPAIRABILITY