# Mechanical mixer for sinks or troughs

Ref. 2564T1

Single control single hole tall mixer with ceramic cartridge



## DESCRIPTION

**Mechanical mixer for sinks or troughs - Ref. 2564T1**

Deck-mounted mechanical basin mixer.
Single control single hole mixer with swivelling spout H. 165mm L. 140mm.
Tall mixer with BIOSAFE hygienic outlet suitable for fitting a BIOFIL point-of-use filter.
Ø 35mm classic ceramic cartridge with pre-set maximum temperature limiter.
Body and spout with smooth interiors (reduces bacterial development).
No risk of cross flow between the hot and cold water.
No non-return valves on the inlets.
Thermal shocks are easy to undertake without removing the control lever or shutting off the cold water.
Flow rate regulated at 5 lpm.
Chrome-plated body, base and spout.
Hygiene control lever L. 185mm requires no manual contact.
PEX flexibles F3/8".
Fixings reinforced by 2 stainless steel rods and back-nuts.
Mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Single hole mixer suitable for people with reduced mobility.
Mixer with 30-year warranty.


## ADVANTAGES

- Hygiene: smooth interior reduces bacteria
- Thermal shock without removing the control lever
- Optimised drop height and spout length
- No manual contact thanks to Hygiene control lever

## TECHNICAL CHARACTERISTICS

**Mechanical mixer for sinks or troughs - Ref. 2564T1**

| | |
|---|---|
| Connector | F3/8" |
| Height | 322mm |
| Drop height | 165mm |
| Spout length | 140mm |
| Flow rate | 5 lpm |
| Temperature limiter | Yes |
| Finish | Chrome-plated brass |
| Norms | ACS, NF, WRAS |
| Warranty | 30 YEAR WARRANTY |

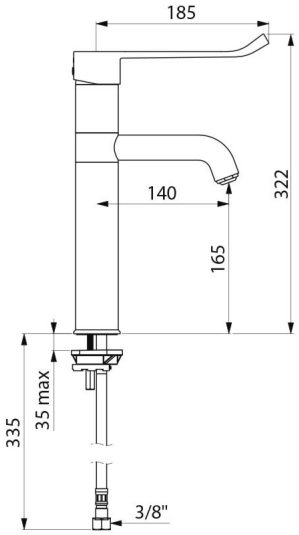

| | |
|---|---|
| Repairability |  |