

# SECURITHERM BIOCLIP

## sequential thermostatic sink mixer

Ref. H9625

Removable sequential thermostatic mixer H. 160mm L. 140mm



### DESCRIPTION

**SECURITHERM BIOCLIP sequential thermostatic sink mixer - Ref. H9625**

Deck-mounted thermostatic SECURITHERM sink mixer.

Sequential thermostatic mixer: opens and closes with cold water.

No risk of cross flow between the hot and cold water.

No non-return valves on the inlets.

BIOCLIP: mixer is easy to remove for cleaning and disinfection.

Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.

Securitouch thermal insulation prevents burns.

Single hole mixer with curved spout H. 160mm L. 140mm fitted with a hygienic flow straightener with no impurity retention and thermal shock-resistant.

Scale-resistant sequential thermostatic cartridge for single control of flow rate and temperature.

Temperature adjusts from cold water up to 40°C with temperature limiter set at 40°C.

Thermal and chemical shocks are possible.

Body and spout with smooth interiors and low water volume.

Flow rate 9 lpm at 3 bar.

No manual contact thanks to Hygiene control lever L. 146mm.

No pop-up waste.

Supplied with PEX flexibles F3/8" with chrome-plated brass stopcocks.

Fixing reinforced by 2 stainless steel rods.

Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Sequential mixer suitable for people with reduced mobility.

30-year warranty.

Also available with copper tails.

### TECHNICAL CHARACTERISTICS

**SECURITHERM BIOCLIP sequential thermostatic sink mixer - Ref. H9625**

Supply	3/8"
Technology	Removable sequential thermostatic mixer
Drop height	160mm
Spout length	140mm
Flow rate	9 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Warranty	<b>30</b> YEAR WARRANTY

### ADVANTAGES



Maximum hygiene: mixer with no non-return valves




Hygiene: can be removed for internal cleaning



SECURITHERM: optimal anti-scalding safety



Sequential: opens and closes with cold water

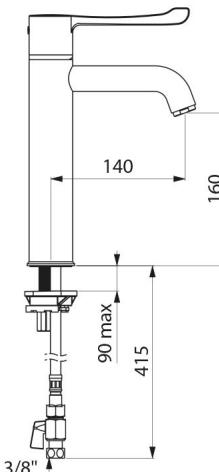

---

Repairability

---

